


A Dept
 B QA
 C QC
 D QF
 E
 F
 G
 H

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/30/20'		

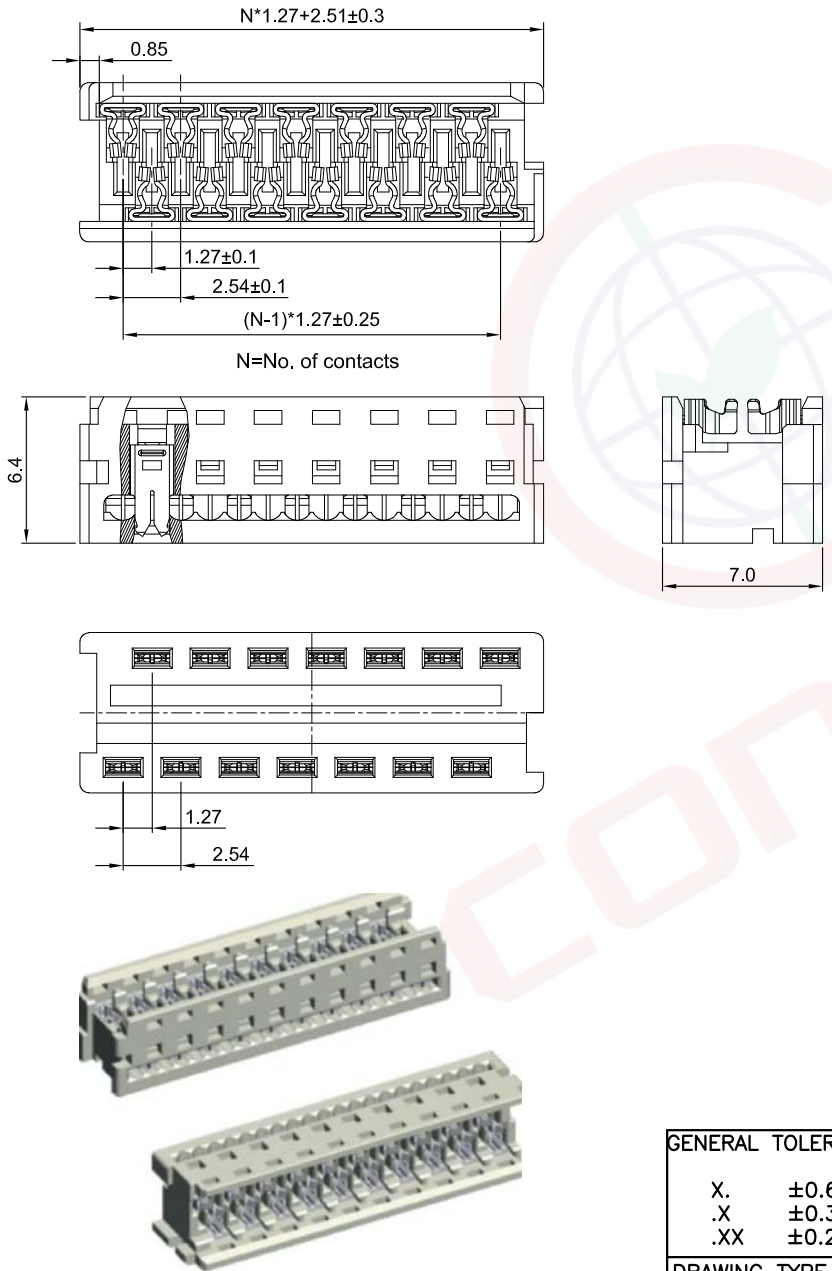

Notes:
 Specifications:
 1. Contact Resistance: 20mΩ Max.
 2. Insulation Resistance: 1000MΩ Min.
 3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 4. Current Rating:2.4A.
 5. Temperature: -40°C~+105°C.
 Materials:
 1. Contact Material: Copper Alloy.
 2. Contact Plating: Tin Plated.
 3. Insulator Material: PBT,White,UL94-V0.
 Product Number Code:

DS1015-11 - X X X X

- X — Packing type
B:Tube
- X — Contact plating
6: Full Tin
- X — Housing color
W:White
- X — No. of contacts
04 06 08 10 12 14
16 18 20 24 26

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	1.27mm White IDC Connector For Cable Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1015-11 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE		CUSTOMER				
SCALE		1:1 SHEET 1 OF 1				
DRAWING NO. C-DS1015-11-XXXX-A						

(Series Image-Reference Only)