

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 12/17/05		

NOTES:

1. SPECIFICATIONS



- . Storage temperature: -40 to +105°C
- . Contact resistance: 30mΩ max.(initial)
- . Insulation resistance: 1,000MΩ min
- . Dielectric withstanding voltage: AC 500V per minute

2. MATERIALS

- . Insulator: Thermoplastic(UL 94V-0)
- . Contact: Copper Alloy

1. PRODUCT NUMBER CODE:

- DS1060- X X X X X
- MOUNTING TYPE
V: VERTICAL TYPE
 - HOUSING COLOR
B:BLACK
L:BLUE
 - CONTACT PLATING
8: FULL GOLD FLASH
0: SELECTIVE GOLD FLASH
 - No.OF CONTACTS
60: 60PIN
 - CONNECTOR TYPE
S: SOCKET
 - SERIES No.
DS1060

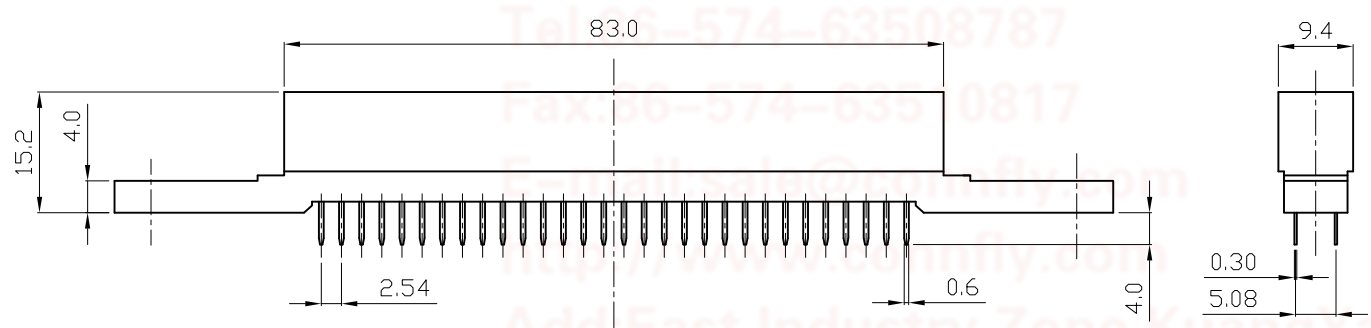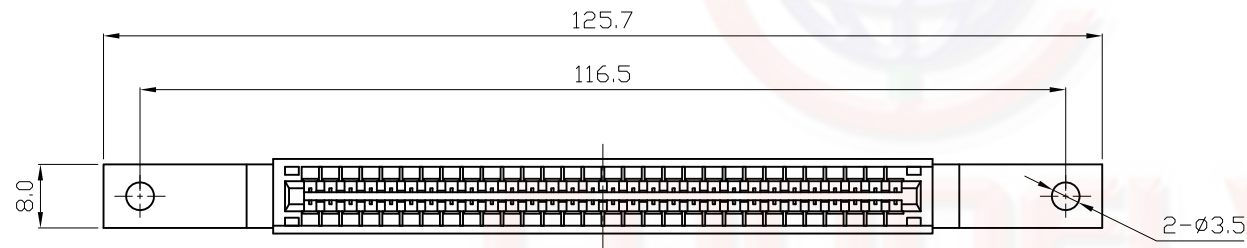

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	2.54mm CARD EDGE SOCKET
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1060

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1060-XXXXX		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD