

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/01/17'		

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C




2. MATERIALS

- . Contact Material: Copper alloy
- . Insulator: Thermoplastic(UL94 V-0).

3. PRODUCT NUMBER CODE:

DS1065-19 - X X X X X

- MOUNTING TYPE
R:R/A TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
- No.OF CONTACTS
1*2-1*40

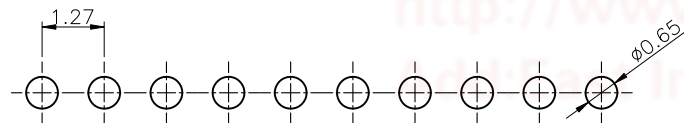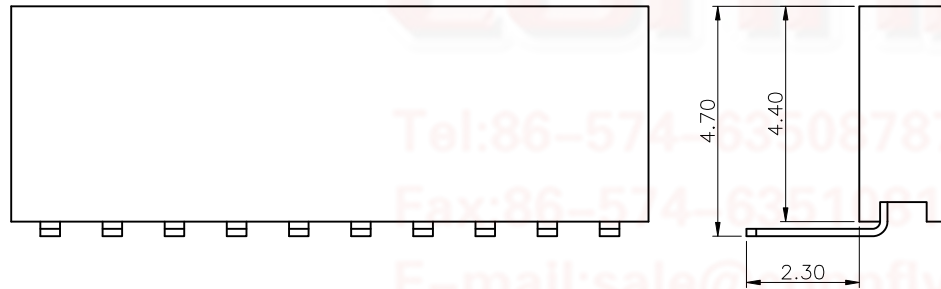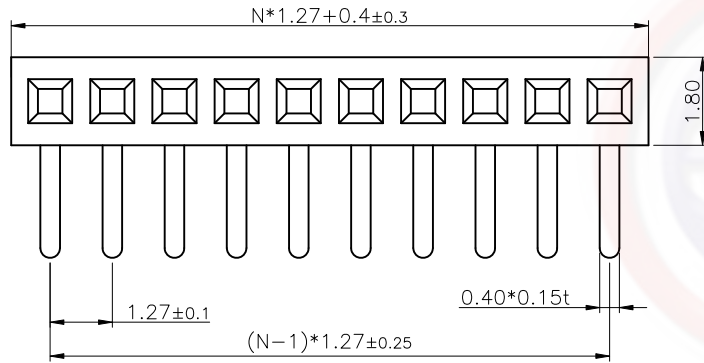

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm Female Header	
X.	±0.60	X.	±5°	UNITS	mm		Single Row R/A Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-19 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1065-19-XXXXX-A						