

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this drawing without the prior written permission of CONNELY may constitute a violation of intellectual property rights and/or other applicable laws. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1


QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

QA	1
QC	1
QF	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/07/12'		LJC 08/07/12'
B	DRAWING UPDATE	JLZ 07/10/17'	HZW 07/10/17'	LJC 07/10/17'
C	ADD P/N CODE	JLZ 08/06/19'		

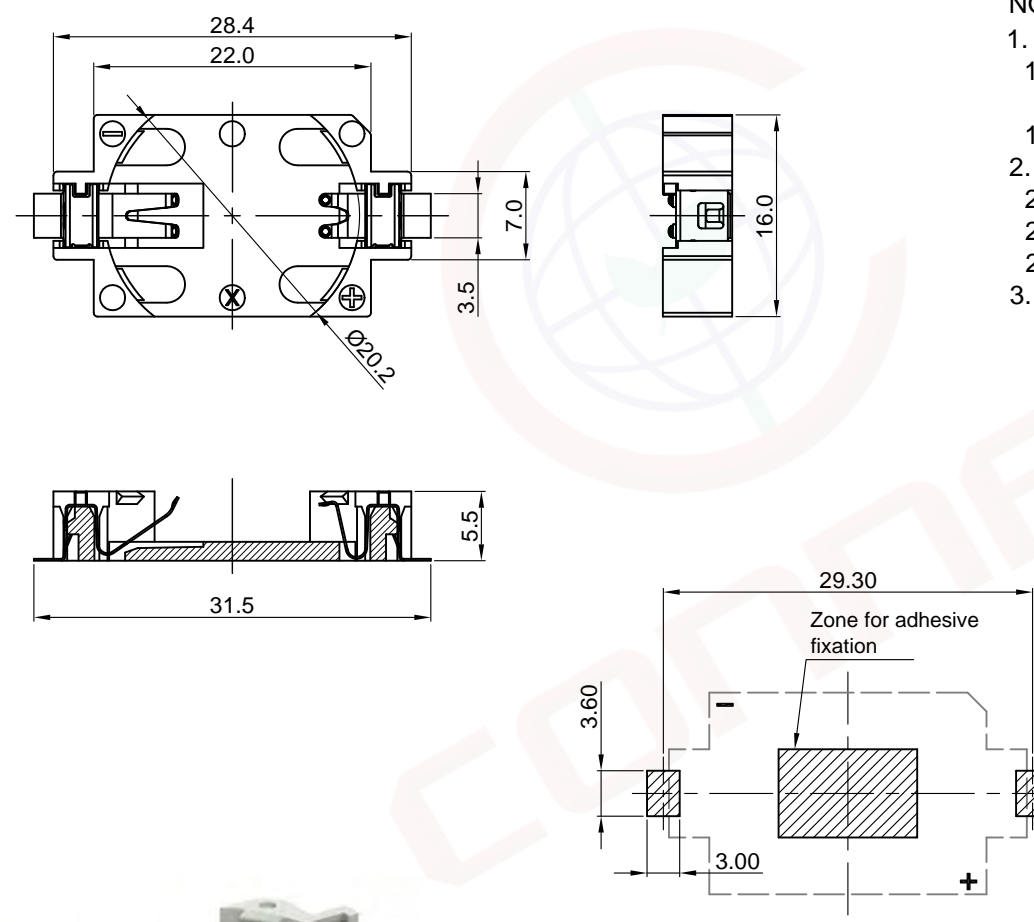

NOTE:

- Materials:
 - Base: Thermoplastic, UL94 V-0, Color of White.
Temp. Range: -25°C to +85°C.
 - Positive & Negative Contacts: Copper Alloy.
- Specification:
 - Dielectric Withstanding Voltage: AC 500V AC.
 - Insulation Resistance: 1000MΩ min.
 - Contact Resistance: 100mΩ Max.
- Part Number Code:

DS1092-10 - X X X - X

 - Packing Type: R: Tape on reel, N/A Code: Tray
 - Housing Material: L: LCP
 - Contact Plating: 6: Tin, 8: Full gold flash
 - Housing Color: W: White

Recommend PCB Layout
Tolerance: ±0.05



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2032 Lithium Coin Cell	
X.	±0.60	X.	±5°	UNITS	mm	Battery Holders Horizontal insert SMT type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1092-10 SERIES	
.XX	±0.25	.XX	±2°			晨翔电子有限公司 CONNELY ELECTRONIC CO., LTD		
DRAWING TYPE		CUSTOMER						
SCALE		1:1		SHEET 1 OF 1				
DRAWING NO.		C-DS1092-10-XXX-X-C						