
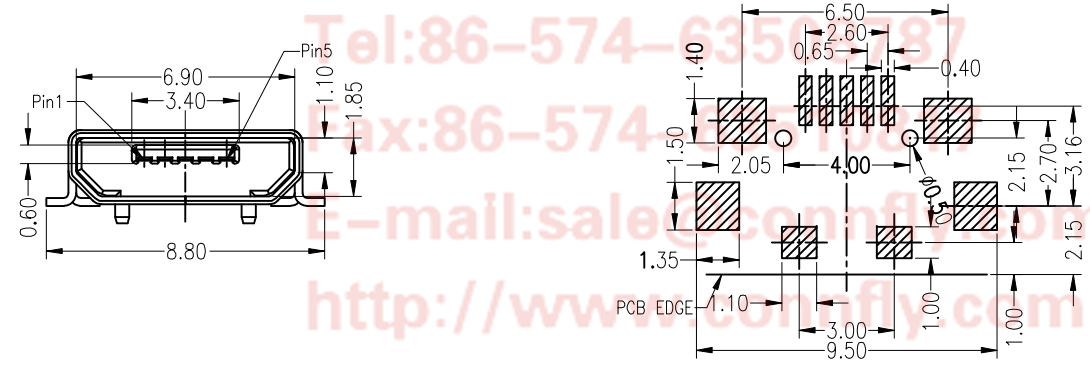


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/04/17'	~	

NOTES:

- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: COPPER ALLOY
- 1.7 PRODUCT NUMBER CODE:  
DS1105-12 - X X X X

- CONTACT PLATED:  
0: Selective Gold Flash  
8: Gold Flash
- MOUNTING TYPE:  
S: SMT
- SHELL PLATED:  
N: Nickel  
6: Tin
- COLOR OF HOUSING:  
B: Black  
W: White

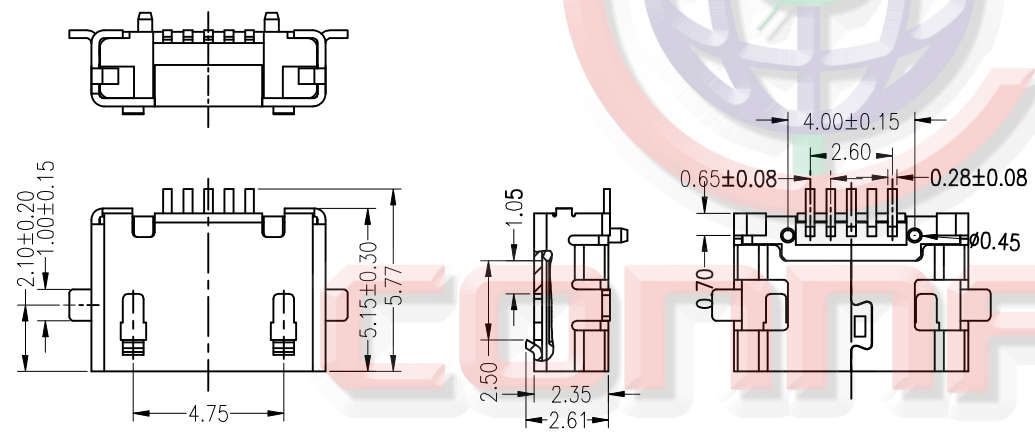

Tel:86-574-6350187  
 Fax:86-574-6350187  
 E-mail:sales@connfly.com  
<http://www.connfly.com>  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1105-12-XXXX-A		

PROJECTION	TITLE	Micro USB Female 5 Positions SMT	
UNITS	mm	W/ Post W/O Flange Type	
SHEET SIZE	A4	SERIES	DS1105-12 SERIES


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**