


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this drawing in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/07/14'	HZW 10/07/14'	LJC 10/07/14'
B	DRAWING UPDATE	JLZ 01/19/19'		

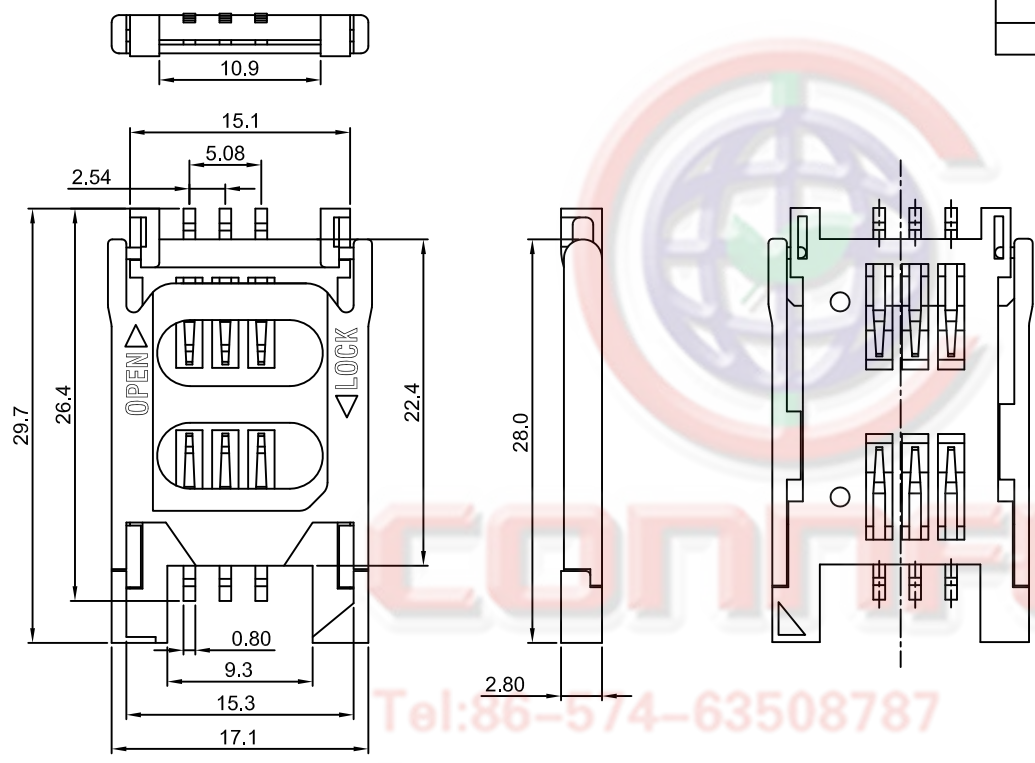

Notes:

1. Material:
 - 1.1. Housing; High Temperature LCP UL 94V-0 Color: Black/Ivory.
 - 2.1. 2. Contacts; Copper Alloy. Selective Gold Flash.
2. Specifications:
 - 2.1. Operate Temperature: -40° C~+85° C
 - 2.2. Insulation Resistance: 1000MΩ Min.
 - 2.3. Contact Resistance: 50mΩ max.
 - 2.4. Withstanding Voltage: 250V AC 1min.
 - 2.5. Voltage Rating: 30V AC/DC
 - 2.6. Current Rating: 1.0A
3. Product Number Code:

DS1138-01 - XX X X X X 0 X

- Packing Type
R: Tape On Reel
- Housing color
B: Black
V: Ivory
- Contact Plating
0: Selective gold flash
4: Selective 3u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
06:6pin

Tel:86-574-63508787
 Fax:86-574-63510817


E-mail:sale@connfly.com

<http://www.connfly.com>

No.1 East Industry Zone KuangYan

Town Cixi Ningbo China

Tel:86-574-6315333

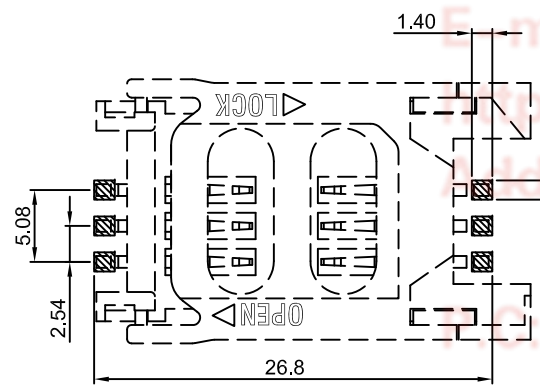

(TOLERANCE ±0.05)
RECOMMEND PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SIM CARD 2.54mm 6P H=2.8mm ZIF TYPE
X.	±0.60	X.	±5°	UNITS	mm	SHEET	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1138-01 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1 SHEET 1 OF 1					
DRAWING NO.		C-DS1138-01-XXXXXXX-B					

1 2 3 4 5 6 7 8