
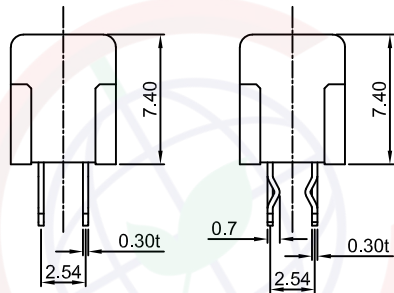



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

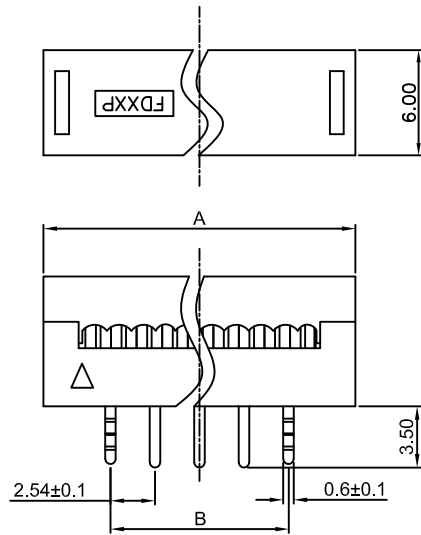

Position	Dim.		Tol.	
	A	B		
06	12.92	5.08	±0.30	±0.25
08	15.46	7.62		
10	18.00	10.16		
12	20.54	12.70		
14	23.08	15.24		
16	25.62	17.78		
20	30.70	22.86	±0.35	±0.35
24	35.78	27.94		
26	38.32	30.48		
30	43.40	35.56		
34	48.48	40.64		
40	56.10	48.26		
50	68.80	60.96		
60	81.50	73.66		
64	86.58	78.74		

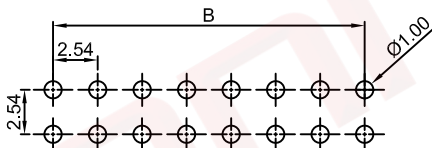

Recommend PCB layout(Tolerance:±0.05)



(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/21/05'		LJC 09/21/05'
C	ADD CONTACTS TYPE	JLZ 09/25/14'		LJC 09/25/14'
E	DRAWING UPDATE	JLZ 10/26/17'	HZW 10/26/17'	LJC 10/26/17'
F	DRAWING UPDATE	JLZ 08/28/18'		

**NOTES:**


1. Materials

- 1.1 Insulator:Thermoplastic(UL 94V-0).
- 1.2 Contact:Copper alloy.

2. Specification

- 2.1 Temperature:-40°C~+105°C.
- 2.2 Contact resistance:20mΩ max.
- 2.3 Insulation resistance:1000MΩ min.
- 2.4 Dielectric withstanding voltage:AC 500V per minute.

3. Product number code:

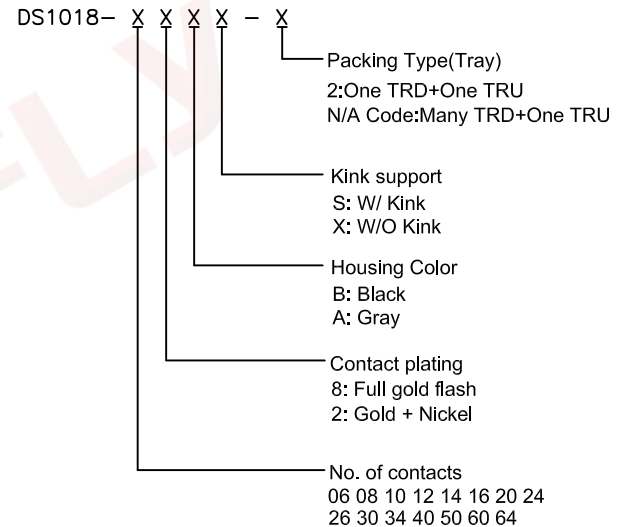

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	DIP PLUG CONNECTOR PITCH 2.54mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1018 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1018-XXXXX-F					

1 2 3 4 5 6 7 8