


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 02/27/18'	~	

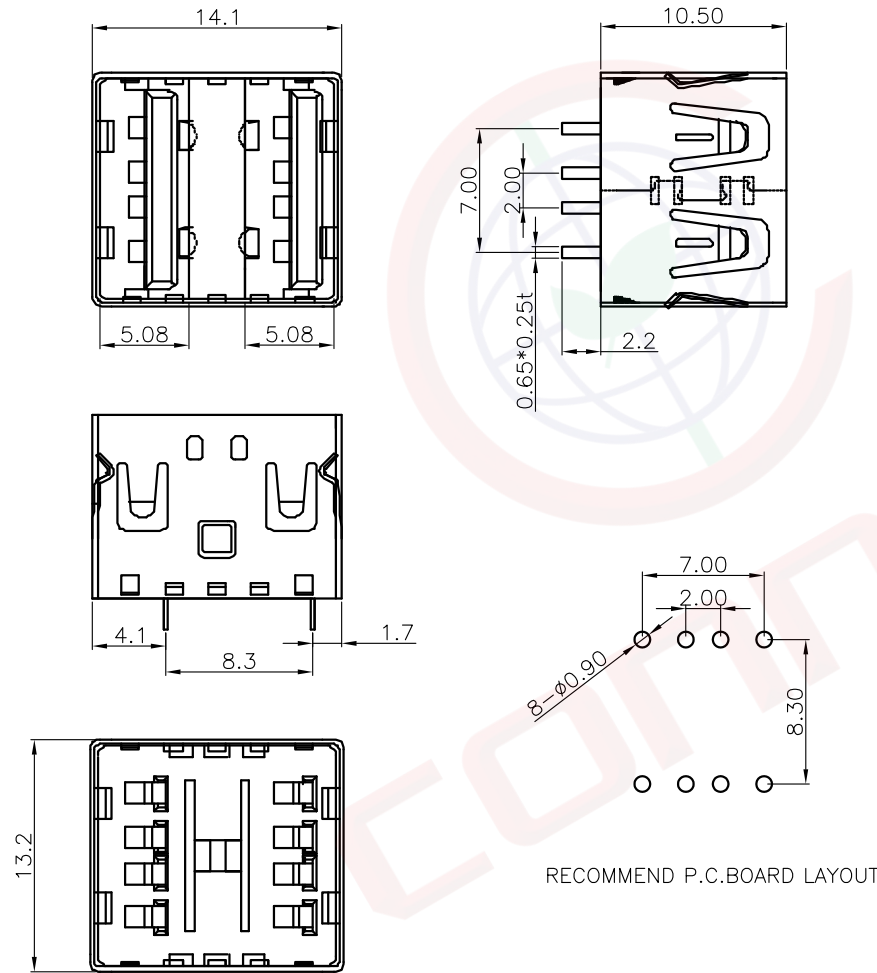

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATOR RESISTANCE:1000MΩ min.AT DC 500V.
 - CURRENT RATING:1.5A MAX.
 - VOLTAGE RATING:30VAC.
 - DIELECTRIC STRENGTH:AC 500V FOR 1 Minute.

- MATERIALS:
 - HOUSING:PBT+30% GLASS FIBER.
 - CONTACT:COPPER ALLOY
 - SHELL:STEEL.

- PRODUCT NUMBER CODE:
DS1096-03 - X X X - X

Shell Materials:
Fe: Steel

Contact Plated:
O: Selective Gold Flash

Shell Plated:
N: Full Nickel

Color Of Housing:
K: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB DUAL 8 PIN RECEPTLCE		
X. ±0.60		X. ±5'		UNITS	mm	180° TYPE H=10.5mm			
.X ±0.38		.X ±3'		SHEET SIZE	A4	SERIES	DS1096-03 SERIES		
.XX ±0.25		.XX ±2'		晨翔电子有限公司 CONFLY CONFLY ELECTRONIC CO. LTD					
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1096-03-XXX-X-A							