


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights. Its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 10/29/06'		LJC 10/29/06'
B	DRAWING UPDATE	JLZ 06/14/16'		
C	DRAWING UPDATE	JLZ 05/30/23'		

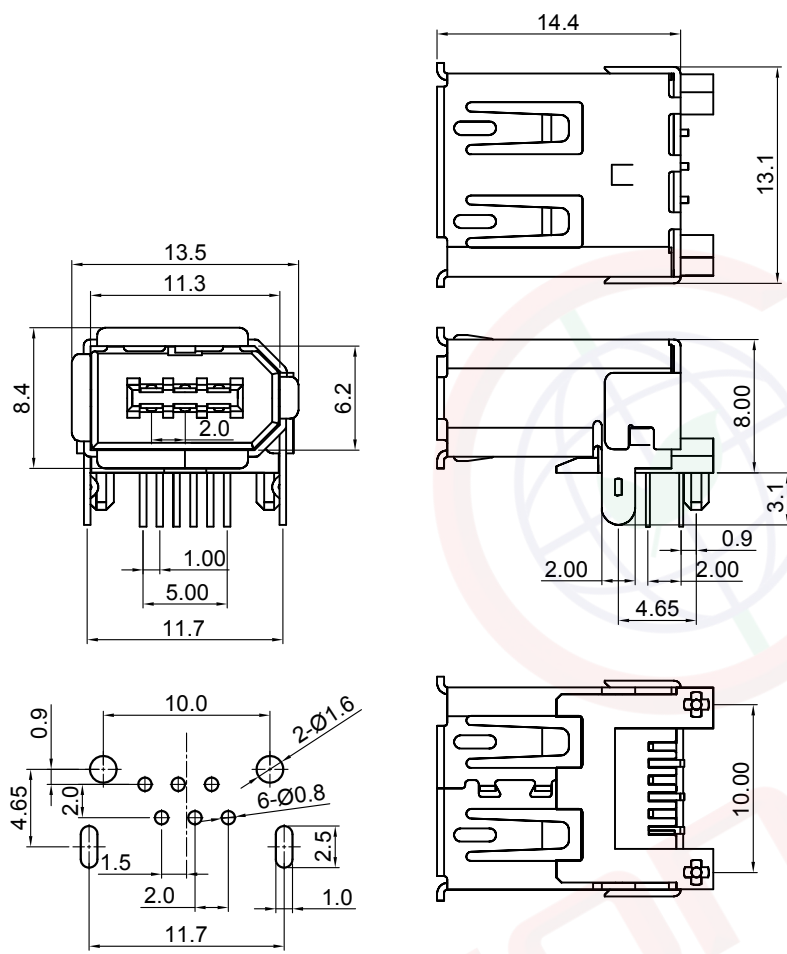

Recommend PCB Layout(Tolerance:±0.05)



(Series Image-Reference Only)

NOTES:

- Specifications
 - Contact Resistance: 50mΩ max
 - Insulator Resistance: 100MΩ min.
 - Current Rating: 1.5 A.
 - Rated Voltage: 30V DC
 - Dielectric withstanding voltage: AC 100V For 1 minute
 - Contact: Copper Alloy
 - Housing: Thermoplastic(UL 94V-0)
 - Shell: Copper Alloy
- Product number code:

DS1101 - X X X

- Contact plating
C: Selective 3u" gold
- Shell plating
N: Nickel
- Color of housing
B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	IEEE 1394 Female 6PIN R/A Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1101 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1101-XXX-C					