
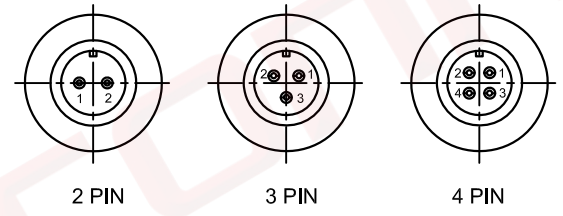
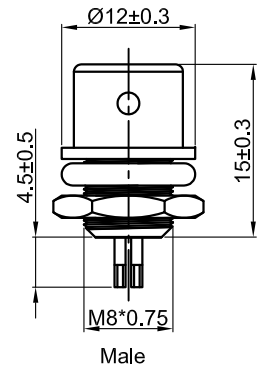
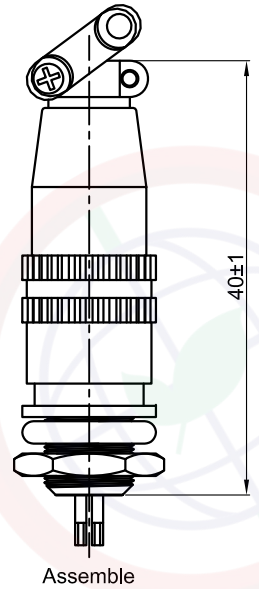


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
RF	1

此處提供的信息來自寧波晨翔電子有限公司並且是保密的。禁止向收件人以外的任何一方向披露信息。本文包含的知識產權及其權利（包括但不限於商標、專利、版權，商業秘密和技術知識）均由晨翔或其附屬公司擁有。未經晨翔事先書面同意，嚴禁未經授權的使用或修改。此處提供的知識產權僅供參考，並不構成以任何形式或方式使用其投標。晨翔可以自行決定強制執行其知識產權。不願行或延遲行使其權利並不構成對這些權利的放棄。

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/19/17'		
B	DRAWING UPDATE	JLZ 11/23/24'		

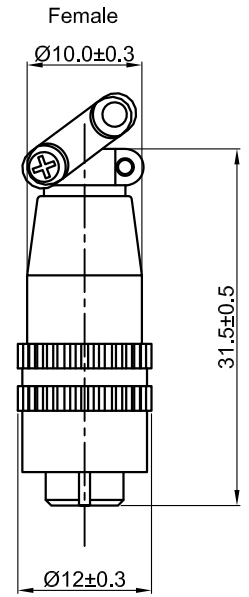

(Series Image-Reference Only)

Notes:


Specifications:

- Contact Resistance: 25mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
- Current Rating:3A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: Plastic,Blue.

Product Number Code:

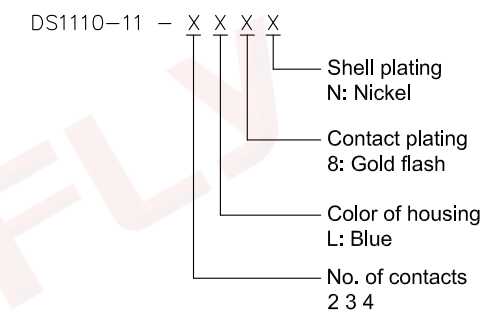

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Micro Jack Total Length=40mm Ref Pin Ø0.6mm Push Pull Type	
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1110-11 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1110-11-XXXX-B						