
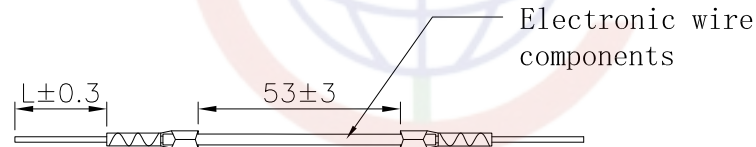
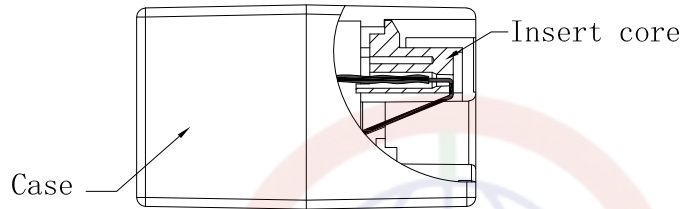




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNELY Electronic Co., Ltd. are strictly protected. Any modification is strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1



Gold needle length L, color	
Long needle	Short needle
14	11.5
Black, Green	Red, Yellow

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 04/10/25'		

Note:

Specification

1. Insulation Resistance: 1000MΩ Min.
2. Withstand Voltage: 1000V AC/Minute.
3. Voltage Rating: 125V AC/DC.
4. Current Rating: 1.5A.
5. Temperature Range: -40~+85° C.

Material:

1. Case:ABS
2. Insert core:HIPS
3. Electronic wire components:28# (7*0.12)

Product Number Code:

DS1133-06-X X X X

- Housing color:
B:Black
- Contact Plating:
8:Full gold flash
- No. of contacts:
4:6P4C
- Connector type:
S:Socket

J1	J2
①	①
②	②
③	③
④	④
⑤	⑤
⑥	⑥

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 6P4C Adaptor	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1133-06 Series
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1133-06-XXXX-A					



晨翔电子有限公司

CONNELY CONNELY ELECTRONIC CO. LTD