

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/14/16'		LJC 06/14/16'
B	DRAWING UPDATE	JLZ 08/04/18'		

- NOTES:**
- Characteristics:
 - Contact resistance: 20mΩ Max.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 500MΩ Min.
 - Current rating: 1A.
 - Environment characteristics:
 - Temperature: -25°C~+85°C.
 - Materials
 - Contact material: Copper alloy.
 - Contact plating: Gold or Tin.
 - Insulator material: Nylon, natural.
 - Product number code:
DS1147-03 - X X X X X 0 X 0

- X X X X X 0 X 0
- Packing type
P: Ploybag
- Housing color
V: Ivory
- Contact plating
6: Tin
8: Gold flash
- Mounting type
R: R/A type
V: V/T type
- Connector type
M: Male
- No. of contacts
02~15

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.50mm ZH Wafer R/A&V/T Type			
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES	DS1147-03 SERIES	
.X	±0.38	.X	±3°							
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET							1 OF 1
DRAWING NO.		C-DS1147-03-XXXXX0X0-B								

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/14/16'		LJC 06/14/16'
B	DRAWING UPDATE	JLZ 08/04/18'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC.
 - SPECIFICATION
 - TEMPERATURE: -20~+85°C.
 - INSULATION RESISTANCE: 500MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 250V PER MINUTE.
 - P/N CODE:

I - DS1147-03 - S C W 0 X

No. of Housing: 02~15
 Housing Color: W: White

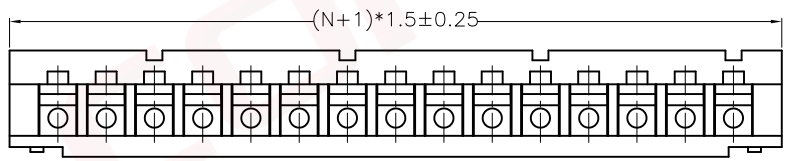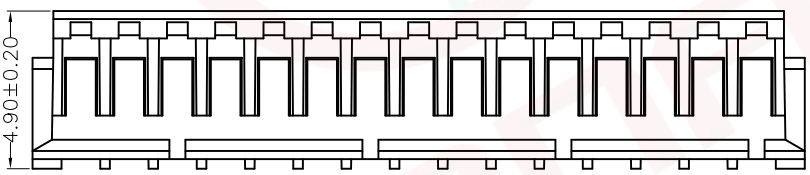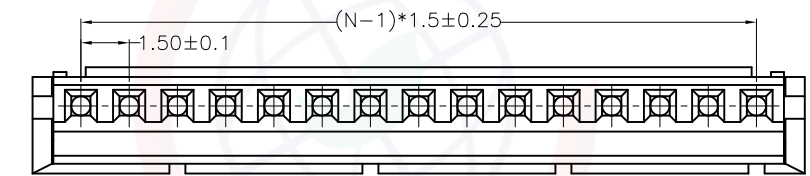


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.50mm ZH Type Housing			
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1147-03 SERIES			
.X	±0.38	.X	±3°	SHEET SIZE	A4					
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1	
DRAWING NO.		I-DS1147-03-SCW0X-B								

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/14/16'		LJC 06/14/16'
B	DRAWING UPDATE	JLZ 08/04/18'		

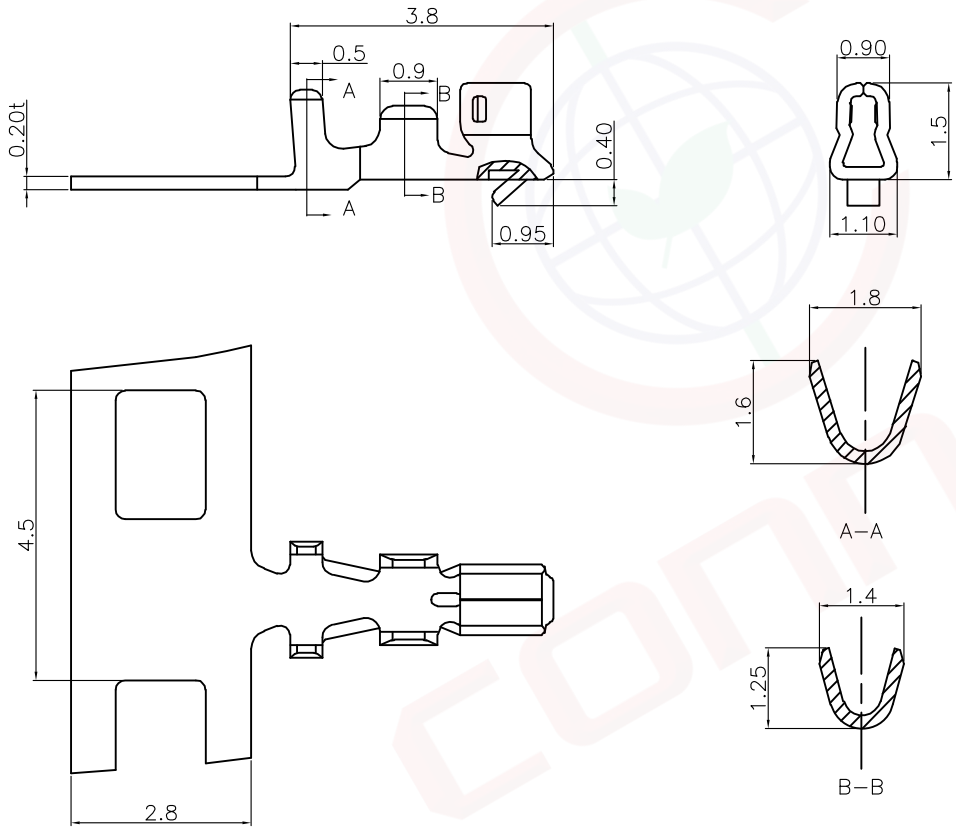

Notes:

- 1.Materials: Copper Alloy.
- 2.Packing Type: Reel Paperl.
- 3.Part Number Code:
T - DS1147-03 - S C X 0 0

Plating:
6: Full Tin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		1.50mm ZH Type Terminal
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1147-03 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD	
SCALE		1:1	SHEET 1 OF 1		
DRAWING NO.		T-DS1147-03-SCX00-B			

1 2 3 4 5 6 7 8