


Dept  
Qty  
DC 1  
ED 1  
IE 1  
ISO 1  
PD 1  
R&D 1  
SD 1  
QA 1  
QC 1  
QF 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/22/18'		
B	DRAWING UPDATE	JLZ 10/08/24'		

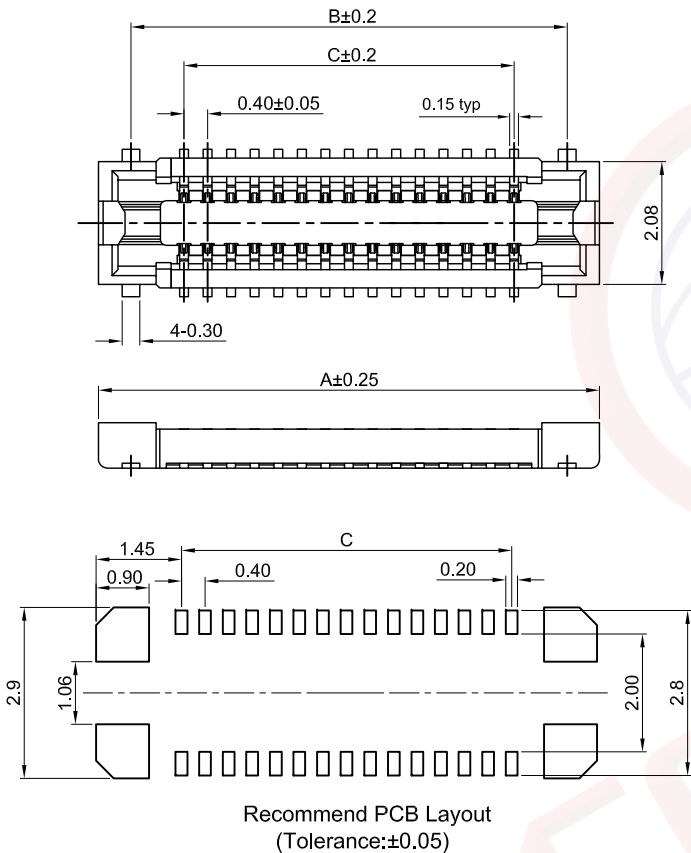

Pin No.	A	B	C
10	4.50	3.40	1.60
12	4.90	3.80	2.00
16	5.70	4.60	2.80
20	6.50	5.40	3.60
24	7.30	6.20	4.40
30	8.50	7.40	5.60
34	9.30	8.10	6.40
40	10.50	9.40	7.60
50	12.50	11.40	9.60

Notes:

Specifications:

- Contact Resistance: 100mΩ Max.
- Insulation Resistance: 50MΩ Min.
- Dielectric Withstanding Voltage: 100V AC(rms) For 1 Minute.
- Current Rating:0.3A/Pin.
- Voltage Rating:30V AC rms.
- Temperature: -40°C~+85°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: LCP,Black,UL94-V0.

Product Number Code:

DS1151-01 - X X X X X 0 X 0

- Packing Type  
R:Tape On Reel
- Housing Color  
B:Black
- Contact Plating  
8:Full Gold Flash
- Mounting Type  
S:SMT Type
- Connector Type  
S:Socket
- No.of Contacts  
10 12 16 20 24  
30 34 40 50

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1151-01-XXXXXXX-B	

PROJECTION		TITLE	0.4mm Board to Board SMT
UNITS	mm		H=0.8mm Series Female Type
SHEET SIZE	A4	SERIES	DS1151-01 SERIES

晨翔电子有限公司  
CONNELY CONNELY ELECTRONIC CO. LTD