

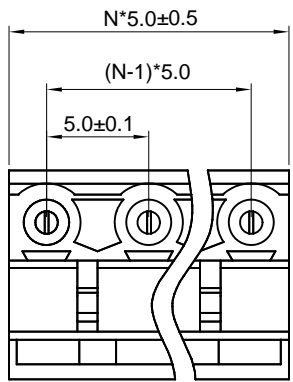


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1



N=No.of contacts

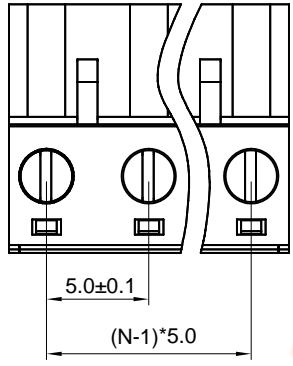

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/13/22'		

**NOTES:**  
 Standard UL  
 Rated voltage:300V  
 Rated current:15A  
 Wrth standing voltage:AC1500V/1 Min  
 Wire range:28~12AWG  
 Temp.Range:-40°C~+105°C  
 Pitch:5.00mm  
 Poles:2~24P  
**Materials:**  
 Contact: Copper Alloy,Tin plated.  
 Insulator: Nylon.  
 Wire guard:Copper Alloy,Nickel Plated.  
 Screw:M2.5,Steel,Zinc Plated.  
**Product Number Code:**

DS1159-21 - X X X X  
 Pitch type  
 1: 5.0mm  
 Contact plating  
 6: Tin  
 Housing color  
 G:Green  
 No.of contacts  
 2-24

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1159-21-XXXX-A		

PROJECTION		TITLE	5.0mm Pluggable Terminal Blocks Type	
UNITS	mm	SERIES	DS1159-21 SERIES	
SHEET SIZE	A4			

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**