


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

Dept	REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
Qty	A	NEW RELEASE	JLZ 09/04/23'		
DC 1					
ED 1					
IE 1					
ISO 1					
PD 1					
R&D 1					
SD 1					
QA 1					
QC 1					
QE 1					

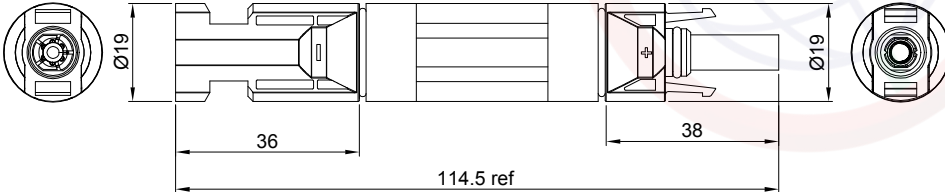

(Series Image-Reference Only)

- Notes:**
- Specifications:**
- Contact Resistance: 0.5mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 6000V AC(rms) For 1 Minute.
 - Current Rating: 10-30A.
 - Voltage Rating: 1000V DC rms.
 - Temperature: -40°C~+85°C.
 - Waterproof rated: IP65.

- Materials:**
- Insulating material: Thermoplastic,Black.
 - Contact: Red Copper,Tin plated.
 - Fingers: Beryllium Copper, Tin Plated.
 - Clip: Stainless Steel.
 - Sealing: Silicone rubber,Black&Red.

Product Number Code:

DS1162-23 - X X X X X

- Current Type
10: 10A 15: 15A
20: 20A 25: 25A
30: 30A
- Packing Type
P: Polybag
- Housing color
B: Black
- Contact plating
6: Tin
- Mounting type
A: Adaptor

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Photovoltaic Secondary Tube Connector
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1162-23 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1162-23-XXXXX-A						

1 2 3 4 5 6 7 8