


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. are strictly protected. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/19/25'		

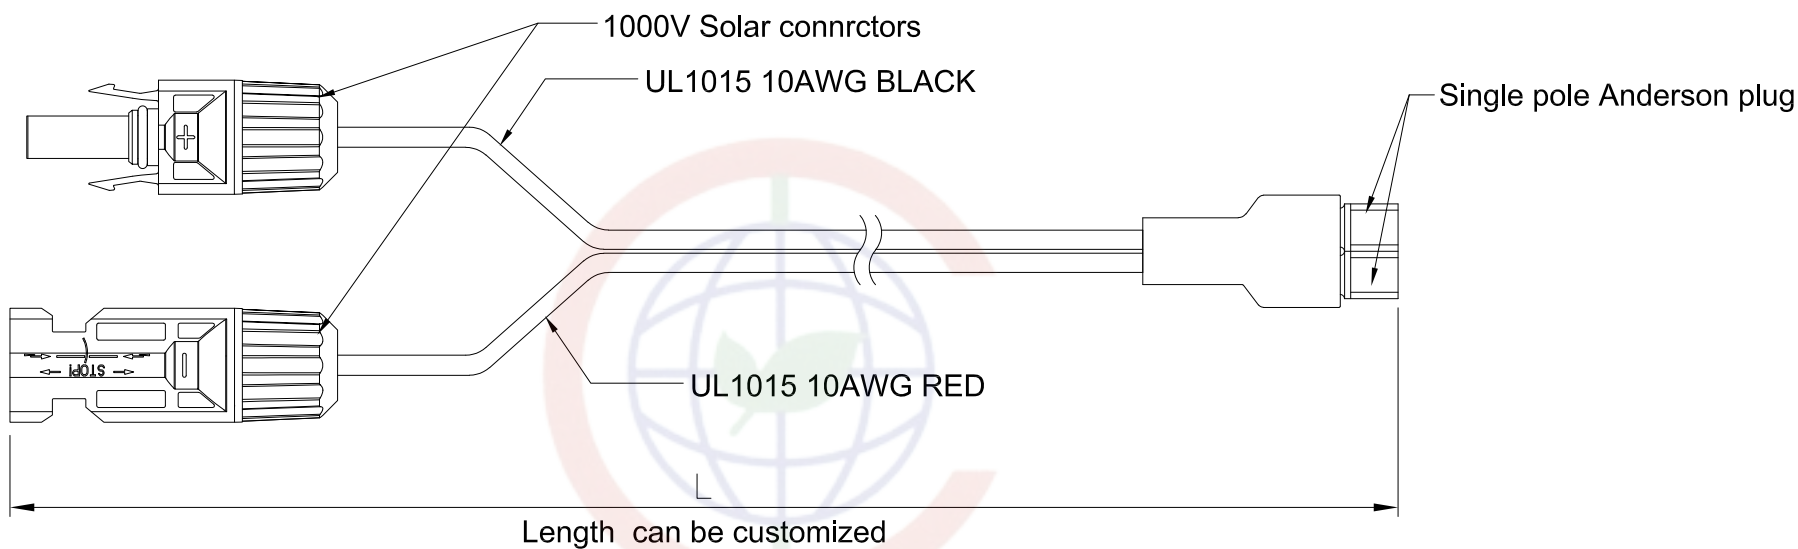

Note:

Specifications:

1. Rated voltage: 600V
2. Rated current: 30A
3. Wire diameter: 10AWG/6mm<sup>2</sup>, 12AWG/4mm<sup>2</sup>
3. Operation Temperature Range: -40~+85°C

Materials:

1. Cable Insulation material: PC/PA/PP0/PVC
2. Core of cable: Tinned Copper

Product Number Code:

DS1162-84-X X X X

- Wire length(Dim L):  
0500:500mm 1000:1000mm ...
- Wire diameter:  
1:10AWG 2:12AWG ...
- Wire gauge:  
1:UL1015
- No. of connector:  
A:Solar connrctors+Anderson plug

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	Solar photovoltaic connector to Anderson mobile power charging cable	
X.	±0.60	X.	±5°		mm		
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE		SERIES	
SCALE		1:1		A4		DS1162-84 Series	
DRAWING NO.		C-DS1162-84-XXXX-A					

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**