


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 02/24/25'		

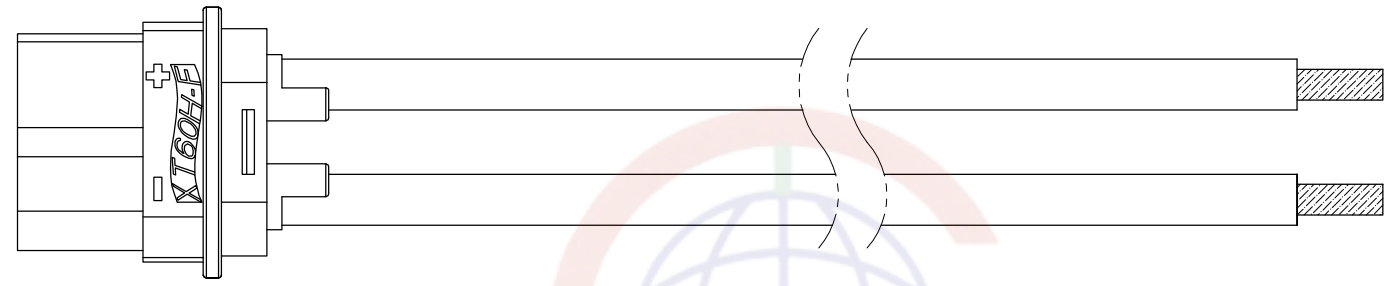

Note:

Specifications:

1. Rated voltage:500V
2. Rated current:30A
3. Contact resistance:0.5mΩ
4. Operation Temperature:-20~120°C

Materials:

1. Cable core Insulation material:PVC/PA66
2. Contact material:Copper alloy

Product Number Code:

DS1171-11-X X X

Wire length(Dim L):  
0100:100mm 0200:200mm...

Wire diameter:  
10:10AWG 11:11AWG 12:12AWG 13:13AWG  
14:14AWG 16:16AWG 18:18AWG

Connector type:  
1:Female  
2:MALE

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	30A HIGH CURRENT POWER CONNECTOR EXTENSION CORD		
X.	±0.60	X.	±5'	UNITS	mm	SHEET SIZE	A4	SERIES	DS1171-11 Series
.X	±0.38	.X	±3'	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>					
.XX	±0.25	.XX	±2'						
DRAWING TYPE		CUSTOMER							
SCALE		1:1							
DRAWING NO.		C-DS1171-11-XXX-A							

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. are strictly protected. Any modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.