



Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 06/16/25'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any form or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

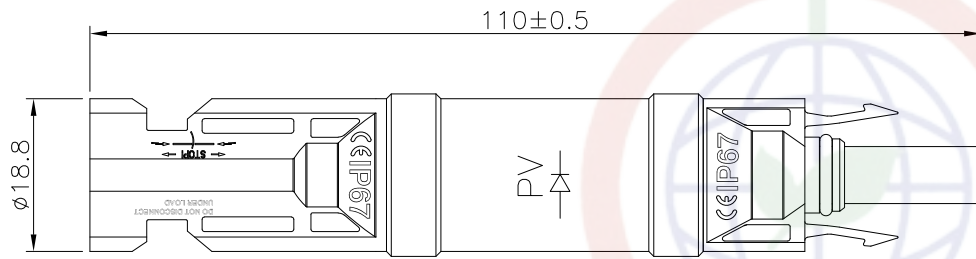

(Series Image-Reference Only)

Notes:

Specifications:

1. Voltage Rating:1000V
2. Current Rating:10A/15A/20A
3. Contact Resistance:0.5mΩ Max
4. Waterproof grade:IP67
6. Ambient Temperature:-40~+85°C

Materials:

1. Insulating material: PPO
2. Contact:Copper, Tin plated

Product Number Code:

DS1190-02 - X X X X X

- X Packing type
- X P:Polybag
- X Current type
- X 10:10A 15:15A 20:20A 30:30A
- X Voltage Type
- X A:1000V
- X Contact plating
- X 6:Full Tin
- X Mounting type
- X A:Adaptor

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	Photovoltaic diode connector
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1190-02 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1190-02-XXXXX-A		

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD