


A	—
B	—
C	—
D	—
E	—
F	—
G	—
H	

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/25'		

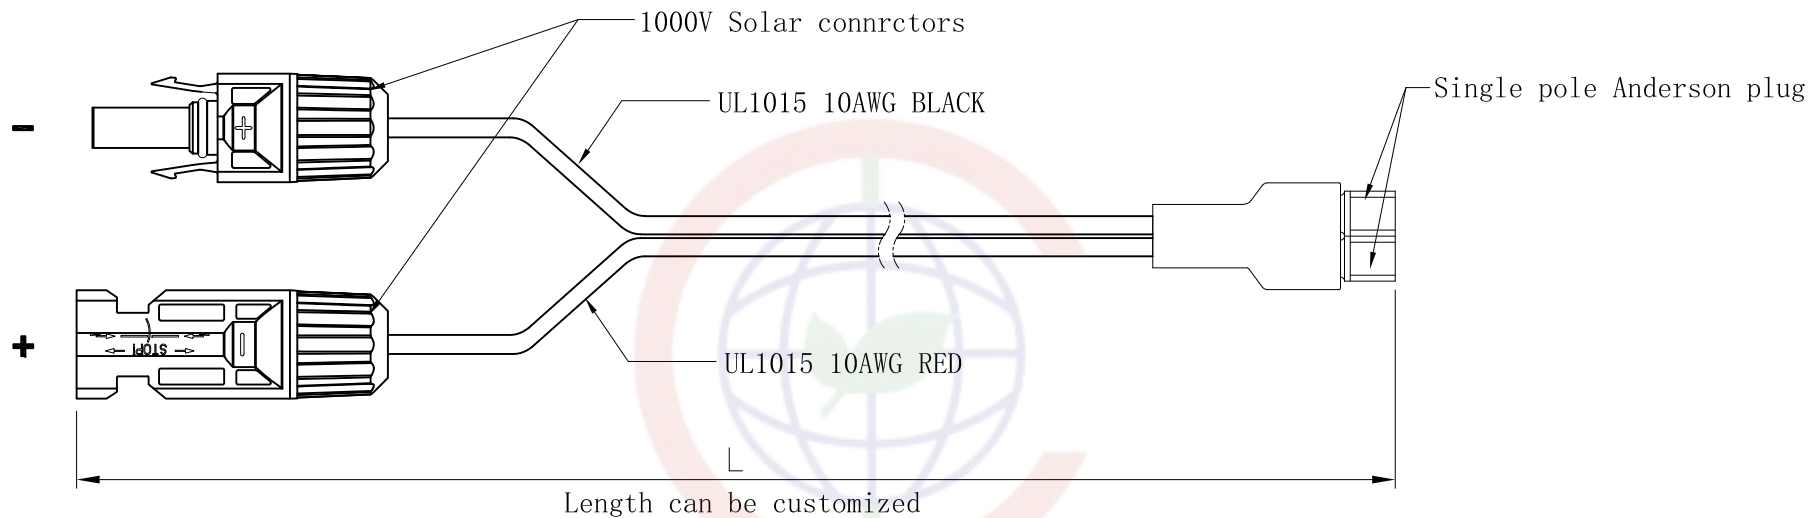

Note:

Specifications:

1. Rated voltage: 600V
2. Rated current: 30A
3. Operation Temperature Range: -40°C ~ $+85^{\circ}\text{C}$

Materials:

- 1.Cable Insulation material:PVC
- 2.Core of cable:Tinned Copper
- 3.Solar connector:PC/PP0, UL94V-0
- 4.Solar connector terminal:Copper alloy,Tin plated.

Product Number Code:

DS1196-04-X X X X X

- Wire length(Dim L):
500:500mm 1000:1000mm...
- Wire diameter:
10:10AWG 12:12AWG ...
- Wire gauge:
1:UL1015
- Voltage Type(Solar connrctors):
1:1000V
- No. of connector:
A:Solar connrctors+Anderson plug

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Solar photovoltaic connector to Anderson mobile power charging cable	
X. ±0.60		X. ±5°		UNITS	mm			
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1196-04 Series	
.XX ±0.25		.XX ±2°		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE	CUSTOMER							
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1196-04-XXXXX-A							