


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/19/25'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

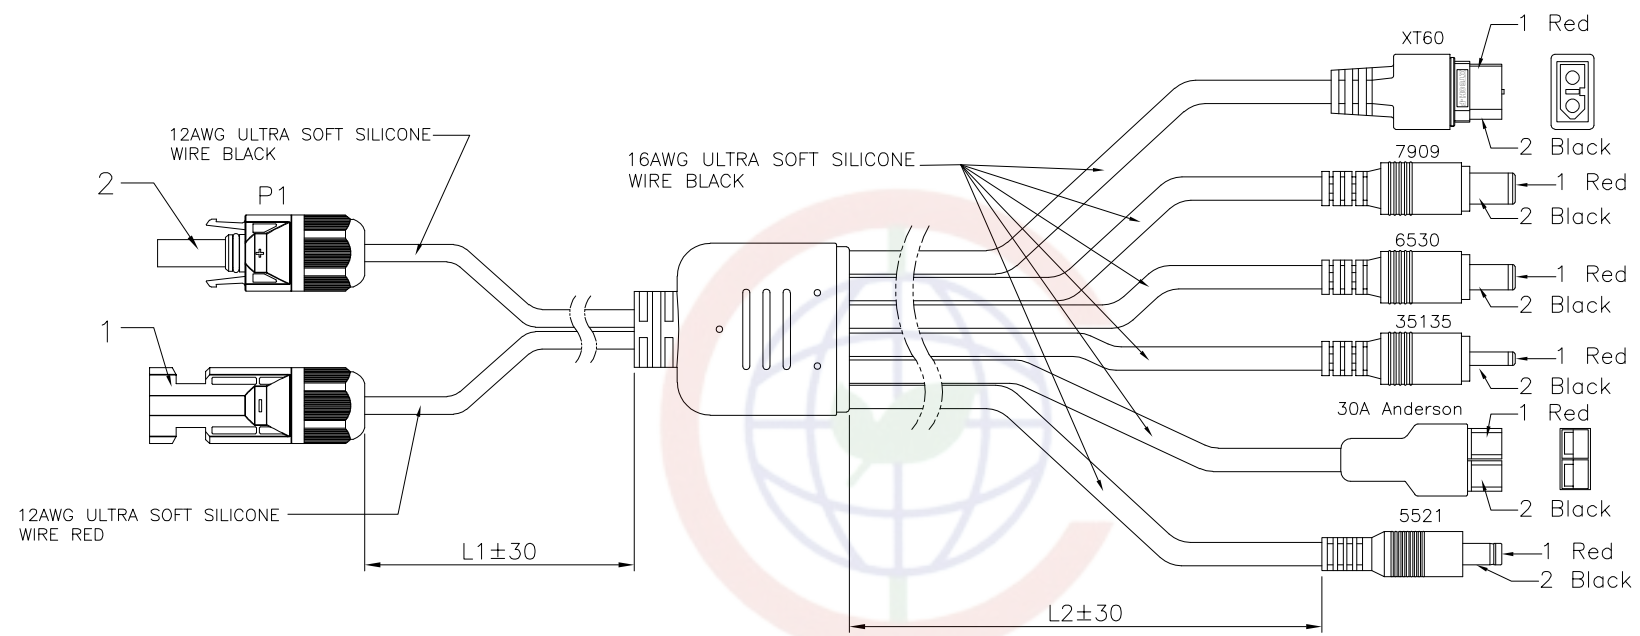

Note:

Specifications:

1. Rated voltage: 12-440V DC
2. Rated current: 16A
3. Current transformer: 2Ω MAX
4. Insulation resistance: 5MΩ MIN

Materials:


1. Cable core Insulation material: Silicone rubber
2. Core material: Oxygen free copper

Product Number Code:

DS1196-07-XXXXXX

- Length (DIM L2): 140:140mm 250:250mm
- Length (DIM L1): 750:750mm
- Wire gauge: 1:12AWG+16AWG
- Type of adapter: 1:PV 1000V+XT60 & Anderson & 7909 & 5521 & 6530 & 35135
- Product category: 6:One to Six

Wiring diagram



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	ONE TO SIX PHOTOVOLTAIC CABLE (XT60 7909 5521 6530 35135 30A ANDERSON)						
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES	DS1196-07 Series				
.X	±0.38	.X	±3°	晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD									
.XX	±0.25	.XX	±2°										
DRAWING TYPE		CUSTOMER											
SCALE		1:1								SHEET		1 OF 1	
DRAWING NO.		C-DS1196-07-XXXXX-A											