

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

Notes:

- 1.3C rated voltage range: 450/750V.
2. working temperature: -20 °C -100 °C.


Material:

1. Ire core material: Oxygen free copper.
2. Sheath material: Environmentally friendly PVC rubber.
3. Protection level: UL94V-0.

Product Number Code:

DS1196-13 - X X X X

- Circular hole size (DimD):  
4:φ4 5:φ5 6:φ6 8:φ8
- Line length (Dim L):  
10:100mm 12:120mm ...
- Cable Size:  
4:4mm<sup>2</sup> 6:6mm<sup>2</sup>
- Insulator Color:  
YG: Yellow&Green

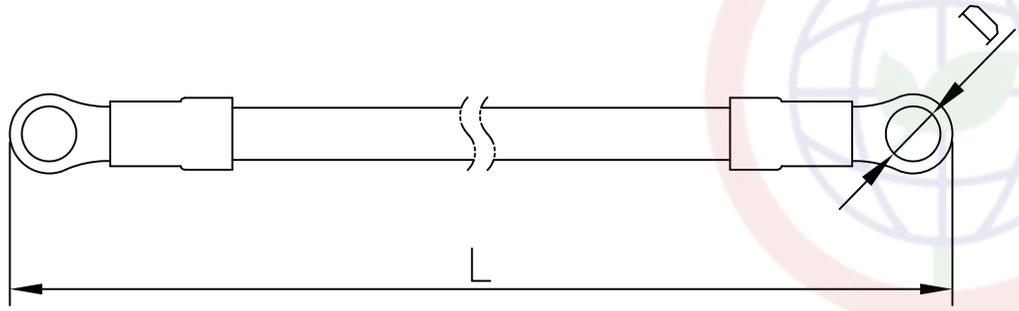

Support customized sizes and lengths



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Yellow-green dual-color photovoltaic panel grounding wire	
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1196-13 SERIES	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1196-13-XXXX-A						