


Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QF	1							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

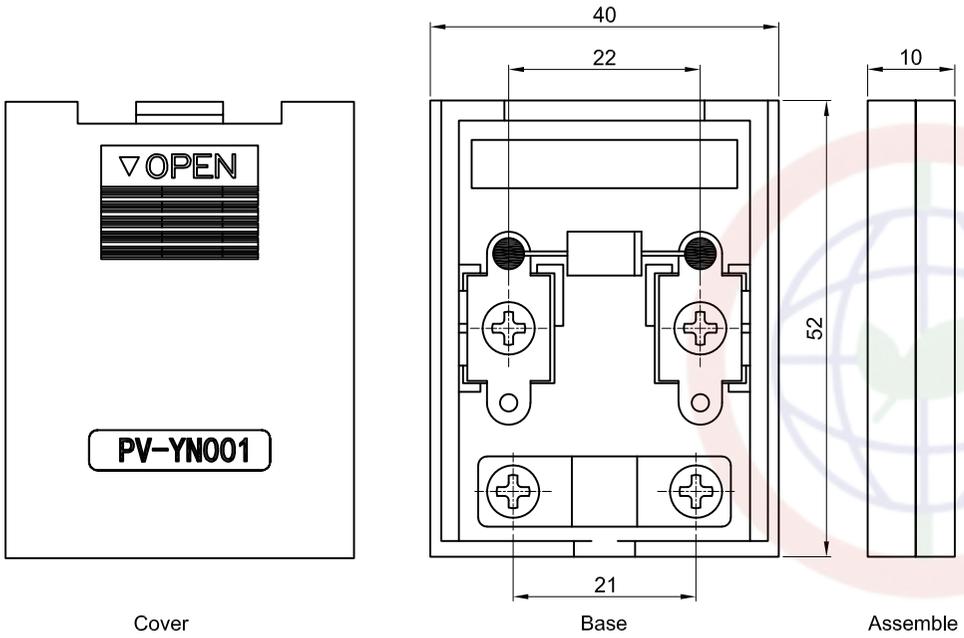

- NOTES:
- Temp. Range: -40° C ~ +85° C.
 - Protection grade: IP54.
 - Cable OD: 1mm².
 - Distance between the terminals: 22.0mm.

- Materials:
- Insulator: PP0, Black.
 - Contact: Copper Alloy, Tin Plated.
 - Screw: Steel.
- Product Number Code:
 DS1203-03 - X X
- Plating type: 6: Tin
 - Main Body Color: B: Black



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PV Junction Box W/ Diode Type	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1203-03 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1203-03 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1203-03-XX-A						