


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

NOTES:
 1. Temp. Range:-40° C~+85° C.
 2. Protection grade:IP65.
 3. Safety Class:Class 2.
 4. Flame Resistance:5VA
 5. Rated Voltage:1000V DC.
 6. Cable OD:4mm².
 7. Distance between the terminals:26mm.
 Materials:
 1. Insulator: PPO, Black.
 2. Contact: Copper Alloy, Tin Plated.
 3. Sealings: Silicone.
 Product Number Code:
 DS1203-06 - X X

Plating type
 6: Tin
 Main Body Color
 B: Black

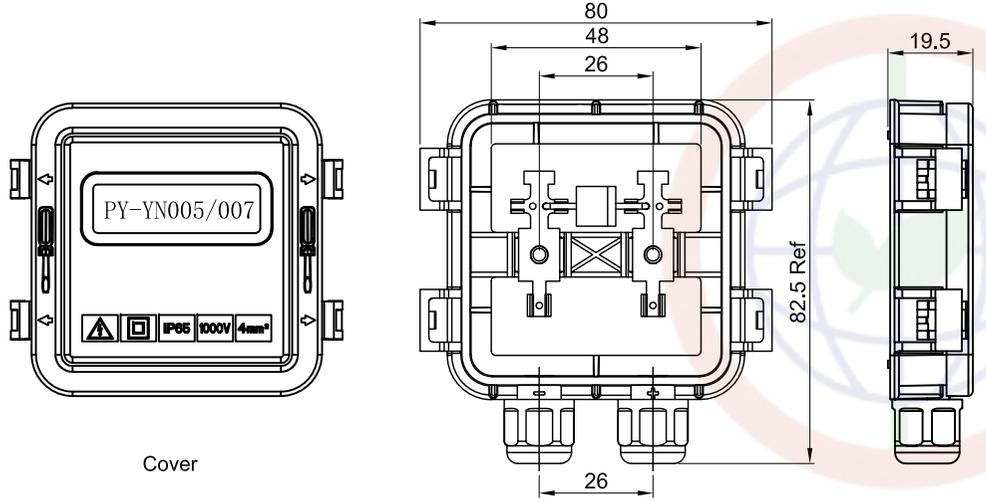

Cover

Base

Assemble



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	PV Junction Box W/ Diode Type	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1203-06 SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1203-06-XX-A		

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD