

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any form or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

NOTES:
 1. Temp. Range: -40° C ~ +85° C.
 2. Protection grade: IP65.
 3. Safety Class: Class 2.
 4. Flame Resistance: 5VA
 5. Rated Voltage: 1000V DC.
 6. Cable OD: 4mm².
 7. Distance between the terminals: 27mm.

Materials:
 1. Insulator: PPO, Black.
 2. Contact: Copper Alloy, Tin Plated.
 3. Sealings: Silicone.

Product Number Code:
 DS1203-10 - X X

Plating type
 6: Tin
 Main Body Color
 B: Black

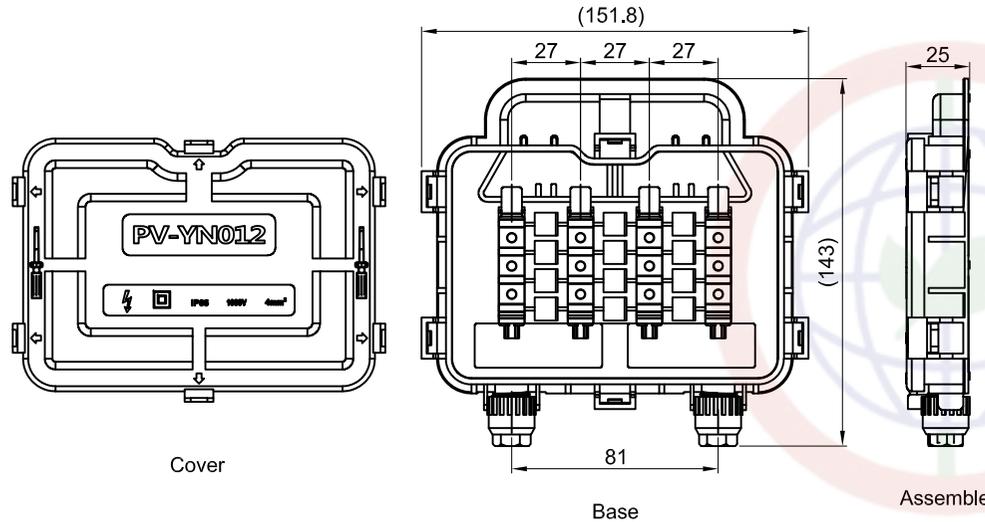

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1203-10-XX-A		

PROJECTION	TITLE
	PV Junction Box W/ Diode Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1203-10 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD