

A	Dept	Qty
A	DC	1
A	ED	1
A	IE	1
A	ISO	1
A	PD	1
A	R&D	1
B	SD	1
B	QA	1
B	QC	1
B	QE	1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are owned exclusively by CONNFLY or its affiliates. All technical drawings, trade secrets, patents, trademarks, copyrights, and other intellectual properties are the property of CONNFLY. CONNFLY reserves the right to take appropriate legal action to protect its intellectual property rights. CONNFLY may enforce its intellectual property rights at its own discretion. Failures or delays to exercise such rights does not constitute a waiver of such rights.

1

2

3

4

5

6

7

8

A

B

C


D

E


F

G

H

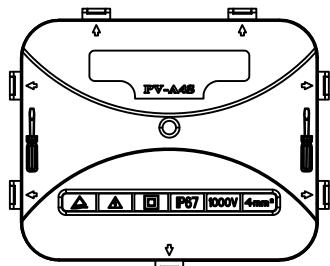

Cover

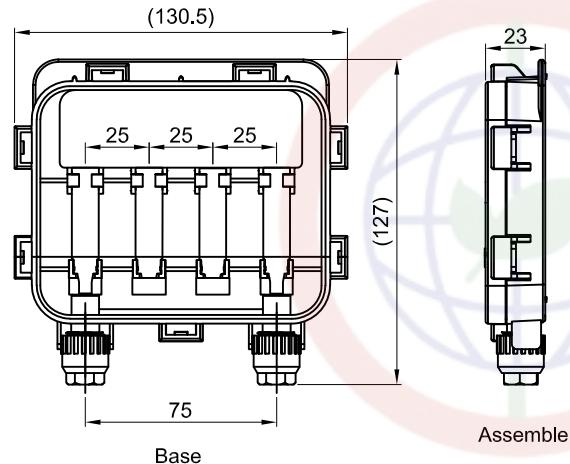

Assemble



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	± 0.60	X.	$\pm 5^\circ$
.X	± 0.38	.X	$\pm 3^\circ$
.XX	± 0.25	.XX	$\pm 2^\circ$
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1203-11-XX-A		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

NOTES:

1. Temp. Range: $-40^\circ C$ ~ $+85^\circ C$.
2. Protection grade: IP65.
3. Safety Class: Class 2.
4. Flame Resistance: 5VA
5. Rated Voltage: 1000V DC.
6. Cable OD: 4mm².
7. Distance between the terminals: 25mm.

Materials:

1. Insulator: PPO, Black.
2. Contact: Copper Alloy, Tin Plated.
3. Sealings: Silicone.

Product Number Code:

DS1203-11 -

Plating type
6: Tin
 Main Body Color
B: Black

®

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD.