
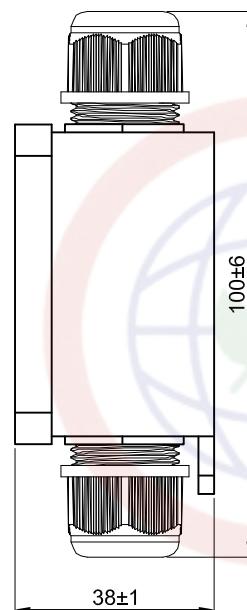


A	Dept	1						
	Qty							
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							



	1	2	3	4	5	6	7	8
A					REV.	DESCRIPTION	DRAWN	CHECKED
B					A	NEW RELEASE	JLZ 05/29/23'	
C								
D								
E					NOTES:			
F					1. Temp. Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.			
G					2. Protection grade: IP68.			
H					3. Cable OD: $\varnothing 5 \sim \varnothing 8\text{mm}$, $\varnothing 9 \sim \varnothing 12\text{mm}$.			
					Materials:			
					1. Insulator: PA66, Black.			
					2. Sealings: Silicone, Yellow.			
					3. Screw: Steel.			
					Product Number Code:			
					DS1204-06 - X X X X			
						Wire Ring Type		
						1: $\varnothing 5 \sim \varnothing 8\text{mm}$		
						2: $\varnothing 9 \sim \varnothing 12\text{mm}$		
						Main Body Color		
						B: Black		
						Box Type		
						F: Female		
						No. of Holes		
						3: 3Pos		

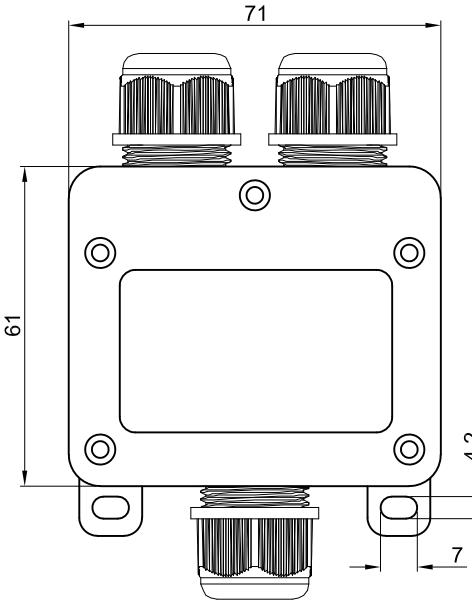

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	± 0.60	X.	$\pm 5^{\circ}$
.X.	± 0.38	.X.	$\pm 3^{\circ}$
.XX	± 0.25	.XX	$\pm 2^{\circ}$
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1204-06-XXXX-A		

 晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD.



Waterproof Wire Junction Box 1
To 2 Type
DS1204-06 SERIES