


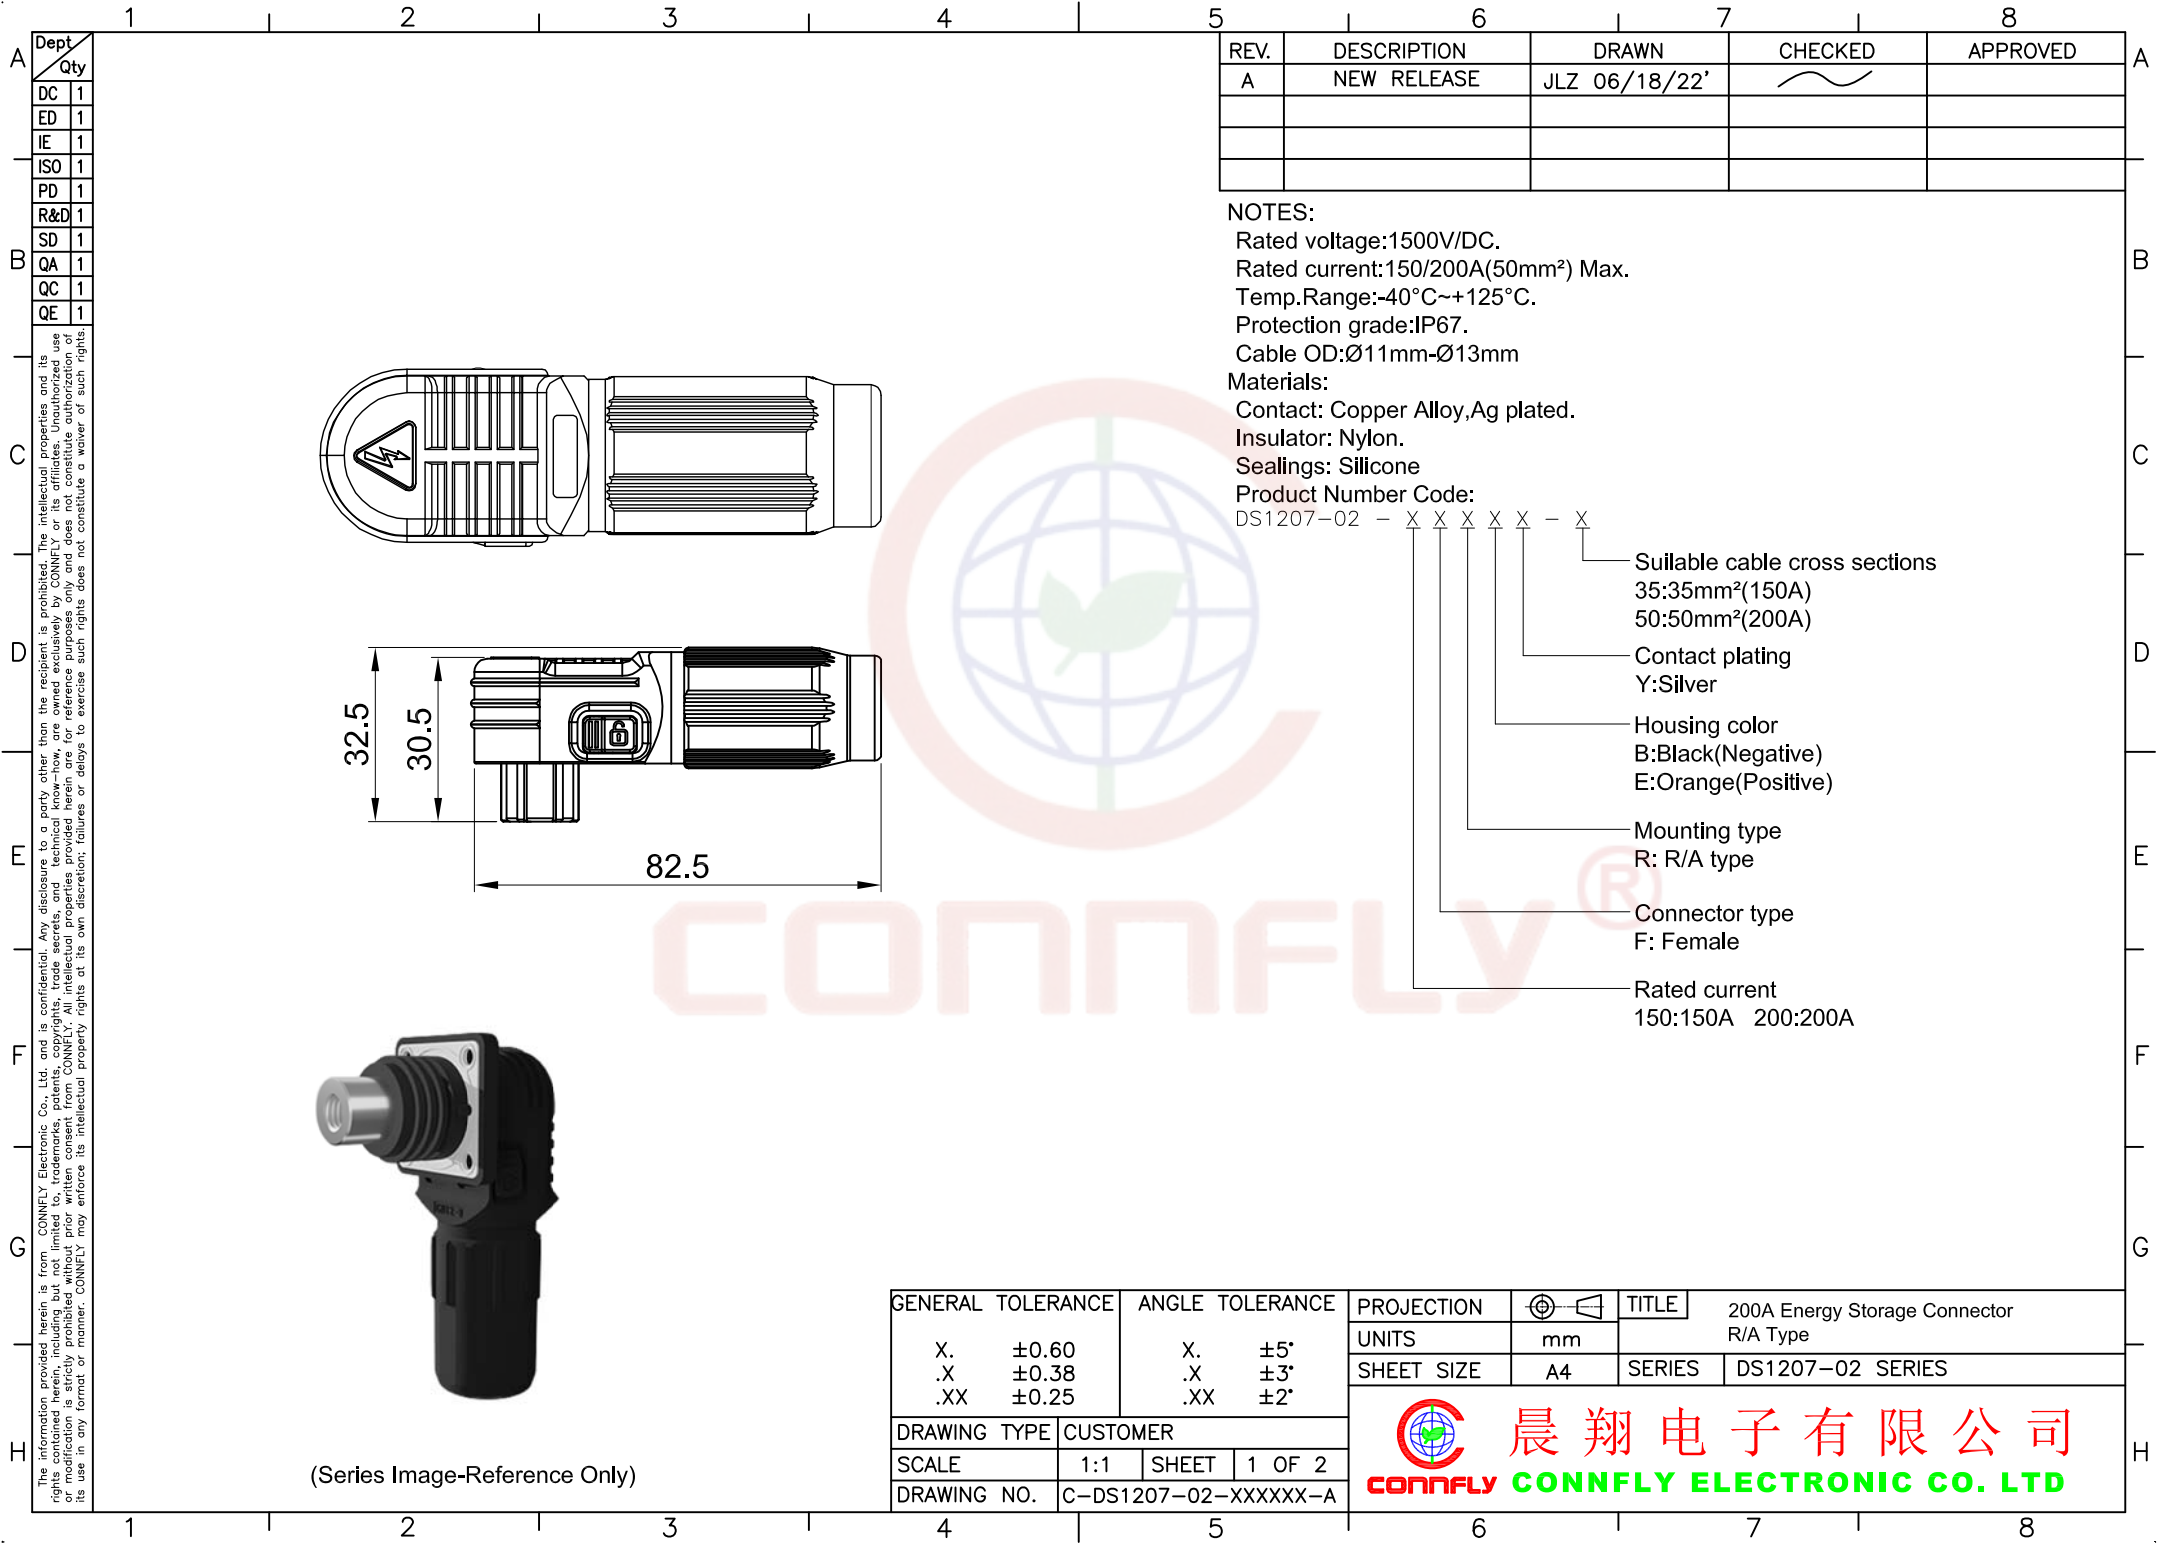

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/18/22'		

NOTES:
Rated voltage:1500V/DC.
Rated current:150/200A(50mm²) Max.
Temp.Range:-40°C~+125°C.
Protection grade:IP67.
Cable OD:Ø11mm-Ø13mm
Materials:
Contact: Copper Alloy,Ag plated.
Insulator: Nylon.
Sealings: Silicone
Product Number Code:
DS1207-02 - X X X X - X

- Suitable cable cross sections
35:35mm²(150A)
50:50mm²(200A)
- Contact plating
Y:Silver
- Housing color
B:Black(Negative)
E:Orange(Positive)
- Mounting type
R: R/A type
- Connector type
F: Female
- Rated current
150:150A 200:200A

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	200A Energy Storage Connector	
X.	±0.60	X.	±5°	UNITS	mm		R/A Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1207-02 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			 晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET	1 OF 2				
DRAWING NO.		C-DS1207-02-XXXXXX-A						

