
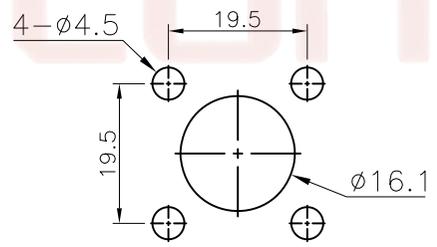
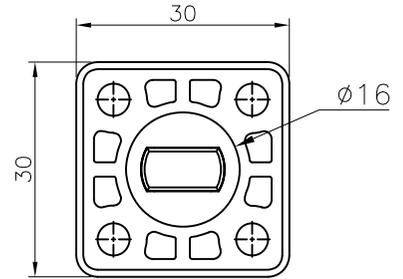




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any form or manner, without the prior written consent of CONNELY, may constitute a violation of applicable laws and regulations. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

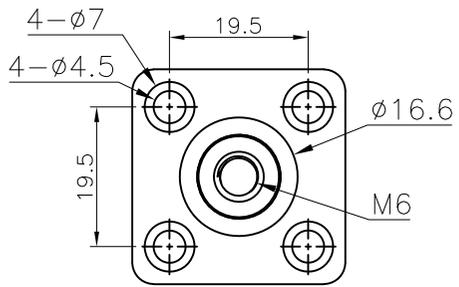

Recommend Panel Hole



(Series Image-Reference Only)

NOTES:
 Rated voltage:600V
 Rated current:200A.
 Contact Barrel Wire Size:6AWG~4AWG
 Temp. Range:-40° C~+125° C.
 Materials:
 Contact: Brass, Nickel plated.
 Insulator: PA66.
 Product Number Code:
 DS1208-01 - X X X X

- X X X X
- Contact plating:
N:Nickel
- Housing color:
B:Black
R:Red
- Connector type:
F:Female
- Rated current:
120:120A







GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		120A WALL (T-SHAPED) WIRING TERMINAL
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1208-01 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD	
SCALE		1:1	SHEET 1 OF 2		
DRAWING NO.		C-DS1208-04-XXXX-A			

1 2 3 4 5 6 7 8

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QF	1							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

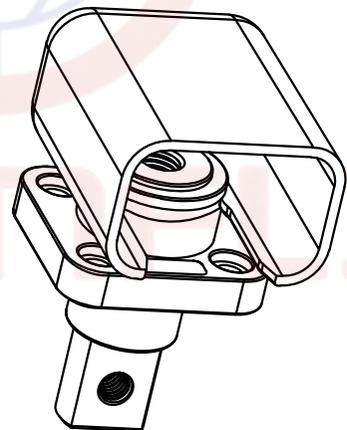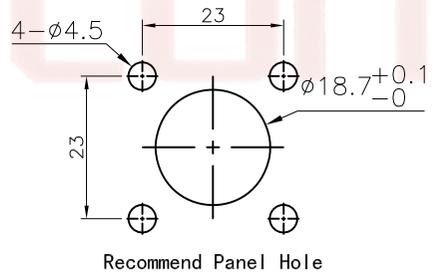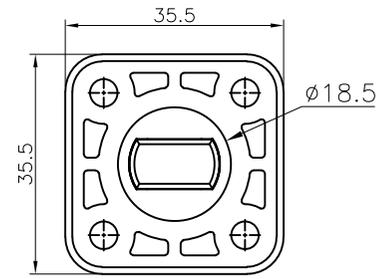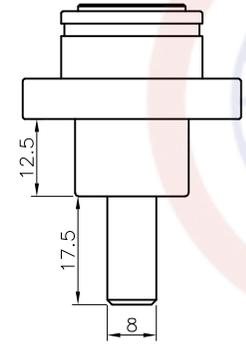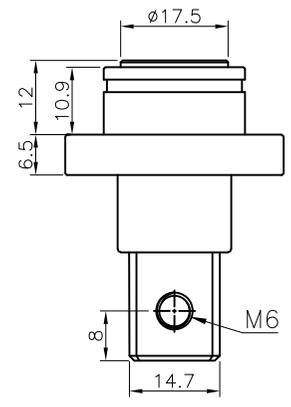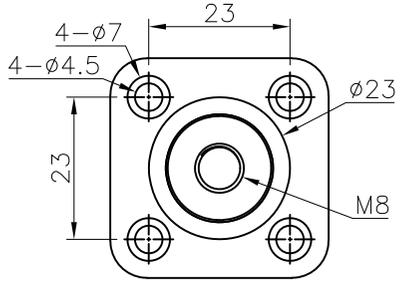

(Series Image-Reference Only)

NOTES:
 Rated voltage:600V
 Rated current:200A.
 Contact Barrel Wire Size:6AWG~1/0AWG
 Temp. Range:-40° C~+125° C.
 Materials:
 Contact: Brass,Nickel plated.
 Insulator: PA66.
 Product Number Code:
 DS1208-01 - X X X X

Contact plating:
 N:Nickel
 Housing color:
 B:Black
 R:Red
 Connector type:
 F:Female
 Rated current:
 200:200A

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	200A WALL (T-SHAPED) WIRING TERMINAL	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	A4	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1208-02 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	2 OF 2					
DRAWING NO.		C-DS1208-02-XXXX-A						