
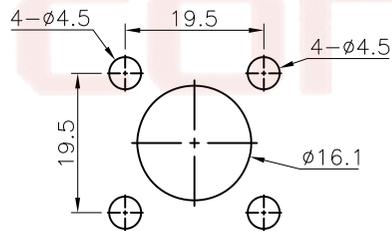
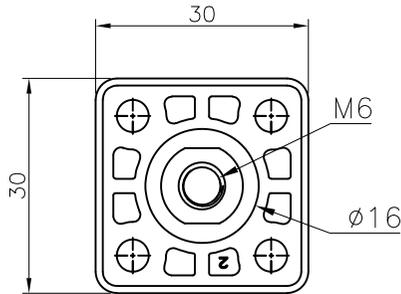





The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

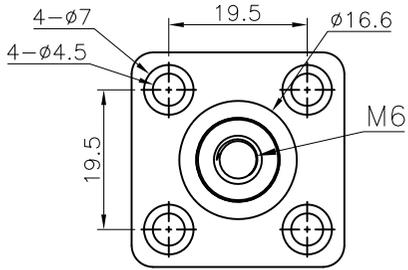

Recommend Panel Hole



NOTES:

Rated voltage:600V  
 Rated current:200A.  
 Contact Barrel Wire Size:6AWG~4AWG  
 Temp. Range:-40° C~+125° C.

Materials:

Contact: Brass, Nickel plated.  
 Insulator: PA66.  
 Product Number Code:

DS1208-02 - X X X X

- X X X X — Contact plating:  
N:Nickel
- X X X X — Housing color:  
B:Black  
R:Red
- X X X X — Connector type:  
F:Female
- X X X X — Rated current:  
120:120A



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	120A DOUBLE TERMINAL	
	mm	SHEET SIZE	A4
UNITS	mm	SERIES	DS1208-02 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1208-02-XXXX-A		






晨翔电子有限公司  
**CONNELY CONNELY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 03/13/26'		

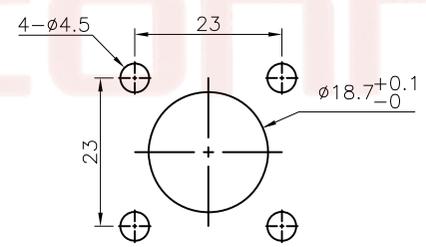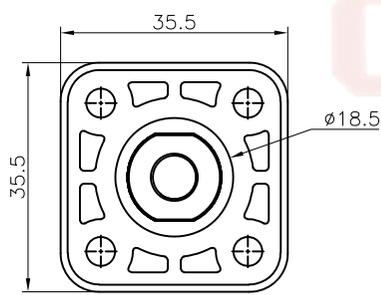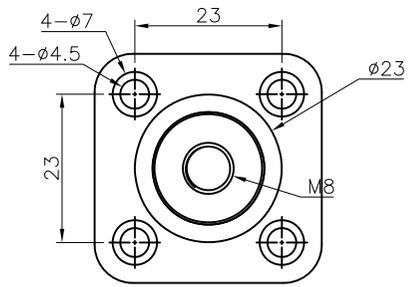

Recommend Panel Hole

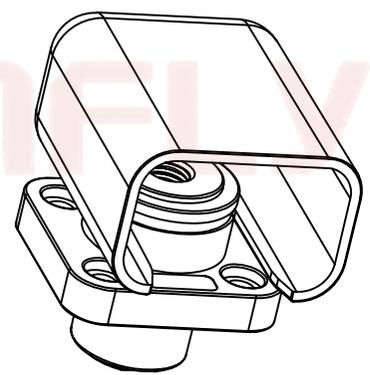

(Series Image-Reference Only)

NOTES:

Rated voltage:600V  
 Rated current:200A.  
 Contact Barrel Wire Size:6AWG~1/0AWG  
 Temp. Range:-40° C~+125° C.

Materials:

Contact: Brass,Nickel plated.  
 Insulator: PA66.  
 Product Number Code:  
 DS1208-02 - X X X X

- Contact plating:  
N:Nickel
- Housing color:  
B:Black  
R:Red
- Connector type:  
F:Female
- Rated current:  
200:200A

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	120A DOUBLE TERMINAL
UNITS	mm
SHEET SIZE	A4
SERIES	DS1208-02 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 2 OF 2
DRAWING NO.	C-DS1208-02-XXXX-A

晨翔电子有限公司  
**CONNELY CONNELY ELECTRONIC CO. LTD**

1                      2                      3                      4                      5                      6                      7                      8