

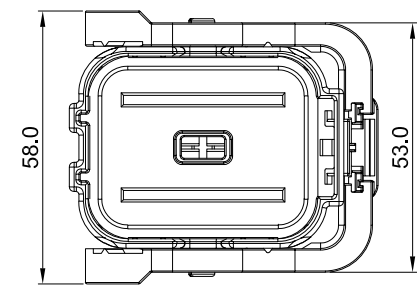


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/29/24'		

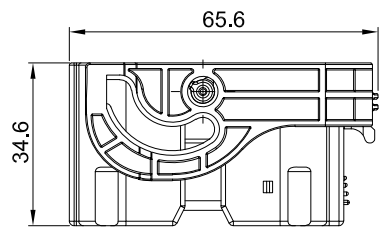

(Series Image-Reference Only)

NOTES:
 Rated voltage:1500V/DC.
 Rated current:350A(95mm²) Max.
 Temp.Range:-40°C~+125°C.
 Protection grade:IP67.
Materials:
 Contact: Copper Alloy,Ag plated.
 Insulator: Plastic.
 Sealings: Silicone
 Product Number Code:

DS1219-01 - X X X X X

- X X X X X
- Contact plating
Y:Silver
- Housing color
E:Orange
- Mounting type
L: Lock Type
- Connector type
M: Male
- Rated current
350:350A



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	350A Energy Storage Connector
X.	±0.60	X.	±5°	UNITS	mm		Mini MSD Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1219-01 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 2 OF 2				
DRAWING NO.		C-DS1219-01-XXXXXX-A					

1 2 3 4 5 6 7 8