



Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

CONNFLY Electronic Co., Ltd. and its subsidiaries. All rights reserved. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. and its subsidiaries are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Male

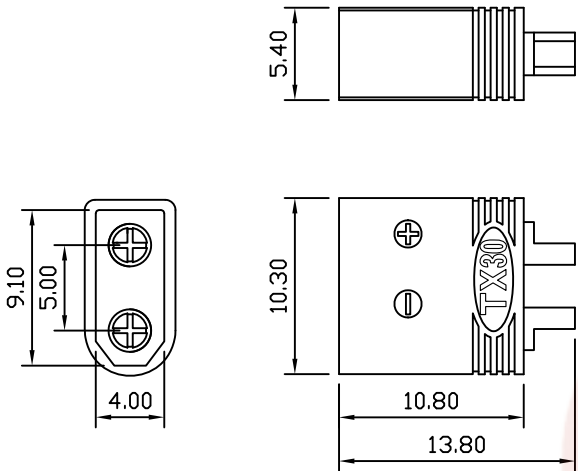

Female

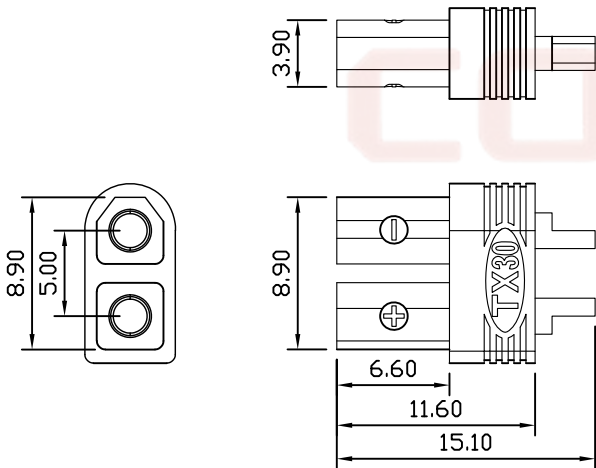


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		

- Notes:
- 1.Rated current: 15A
 - 2.Voltage endurance: 500VDC
 - 3.Contact resistance: 0.5mΩ
 - 4.Insulation current: 2000MΩ
 - 5.Instantaneous current: 30A
 - 6.Environmental temperature: -20 ℃ -120 ℃
 - 7.Mechanical lifespan: 1000 times
 - 8.Recommended wire gauge: 18AWG

- Materials:
- 1.Insulation Material: PA66
 - 2.Metal material: Brass with gold plating
 - 3.Protection level: IP40

Product Number Code:
DS1220-01-XXXX

- Housing color:
Y:Yellow
- Contact Plating
8:Full gold flash
- Connector type:
M:Male F:Female
A:Male+Female
- No. of Contacts
2:2

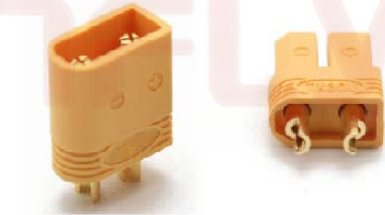

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	15A Power connector Solder Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1220-01 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1220-01-XXXX-A					