
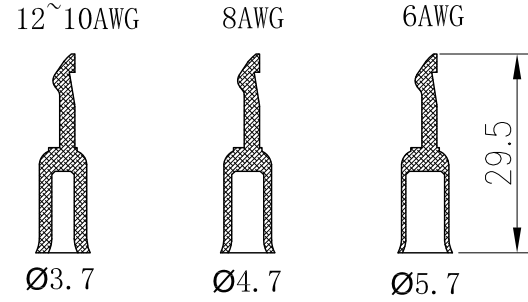


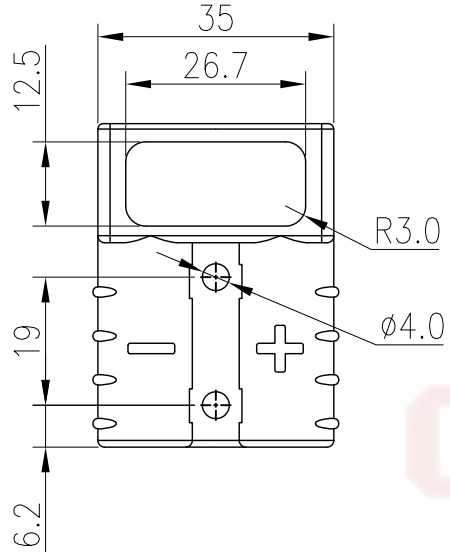


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



Contact Product Number Code:
T-DS1224-02-C Y 0 0

Contact Plating
Y:Full Silver
Mounting type:
C:Crimp type

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		

Notes:

- 1.Rated current: 50A
- 2.Voltage endurance: 600VDC
- 3.Recommended wire gauge: 12~6AWG

Materials:

- 1.Insulation Material: PC
- 2.Metal material: Copper plated with silver
- 3.Protection level: IP54
- 4.Flame retardant grade:UL94V-0

Product Number Code:

DS1224-02-X X X X

Contact Plating
Y:Full Silver
Housing color:
G:Gray
Wire gauge:
6:6AWG 8:8AWG 10:10-12AWG
No. of Contacts
2:2

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	Anderson plug 50A
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1224-02 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1224-02-XXXX-A					

晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD