
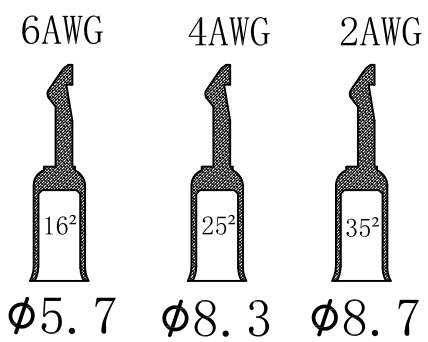
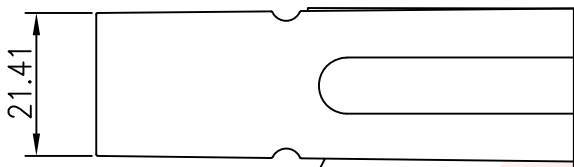



Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

CONNFLY Electronic Co., Ltd. and its confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

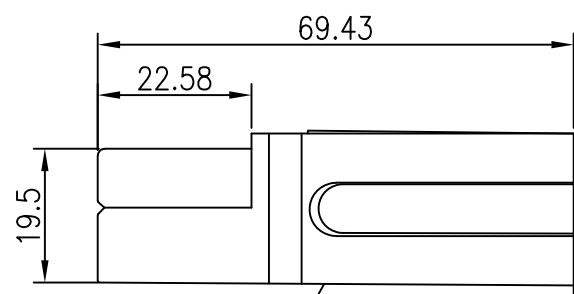

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 04/29/26'		

Notes:

1. Rated current: 120A
2. Voltage endurance: 600VDC
3. Recommended wire gauge: 6/4/2AWG

Materials:

1. Insulation Material: PC
2. Metal material: Copper plated with silver
3. Protection level: IP54
4. Flame retardant grade:UL94V-0

Product Number Code (Housing+Contact):
DS1224-08-X X X X

- Contact Plating
Y: Full Silver
- Wire gauge:
6: 6AWG 4: 4AWG 2: 2AWG
- Housing color:
B: Black R: Red L: Blue
G: Green A: Gray
- No. of Contacts
1: 1



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	Anderson plug 40A
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1224-08 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE		CUSTOMER				
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1224-08-XXXX-A				