
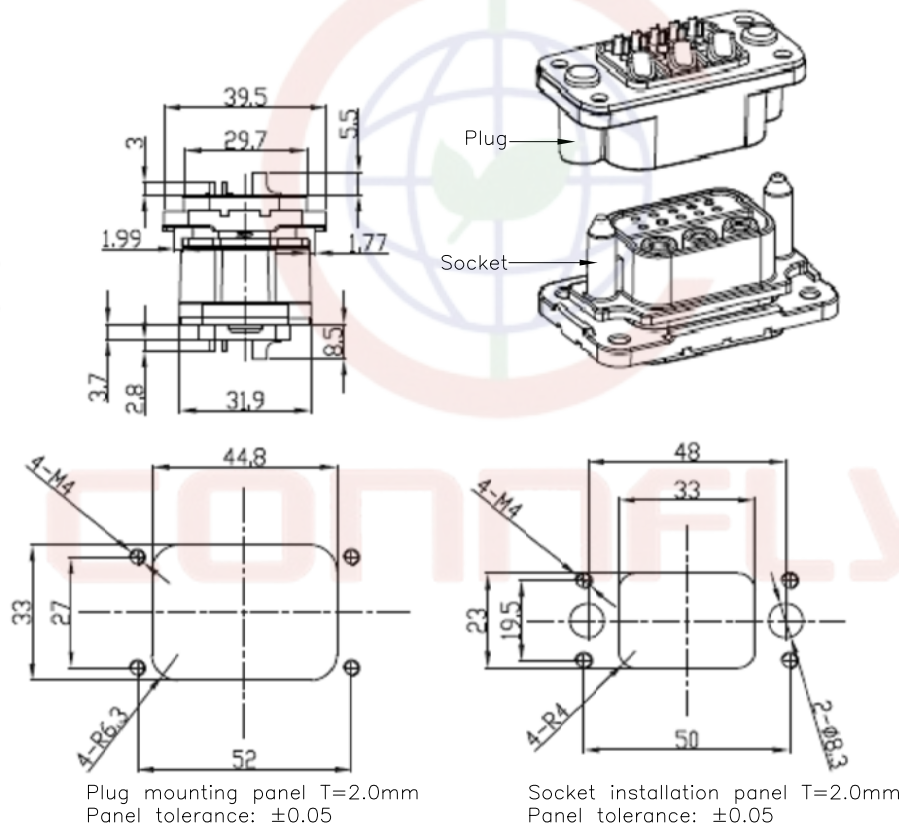


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNFLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

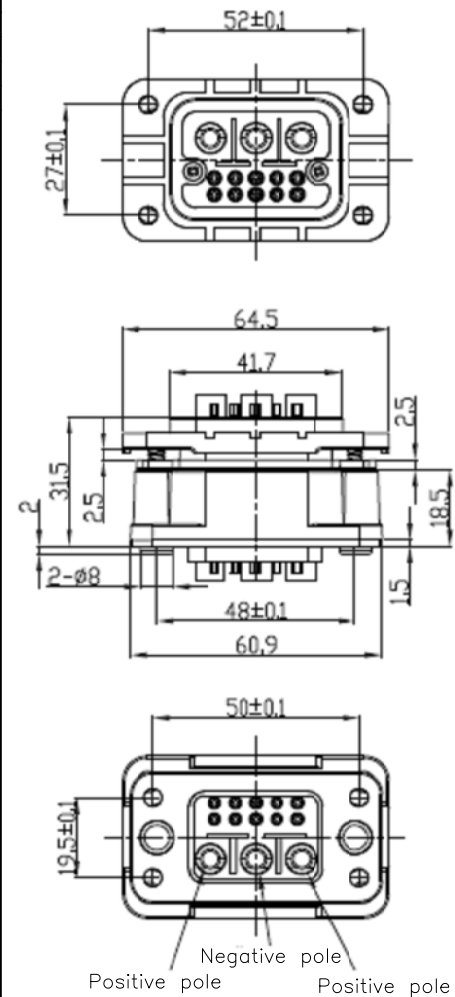

Notes:

1. Rated current: 50-70A
2. Rated voltage: 220V DC
3. Dielectric strength: 500V AC
4. Insulation resistance: >10MΩ @ 500V DC
5. Contact impedance: ≤0.5mΩ
6. Environmental temperature: -40℃ -125℃

Materials:

1. Insulation Material: PA66, UL94V-0
2. Contact material: Brass

No water proof

Product Number Code:

DS1231-03-X X X X X

- Packing Type:
P: Ploybag
- Housing color:
B: Black
- Contact Plating
8: Full Gold Flash
- Connector type:
A: Plug+Socket
- No. of Contacts
10: 3 Power Pins+10 Signal Pins



(Series Image—Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3+10Pin Floating Energy Storage Stack Connector		
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1231-03 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1231-03-XXXXX-A							

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD