


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of any part of this document in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/29/23'		

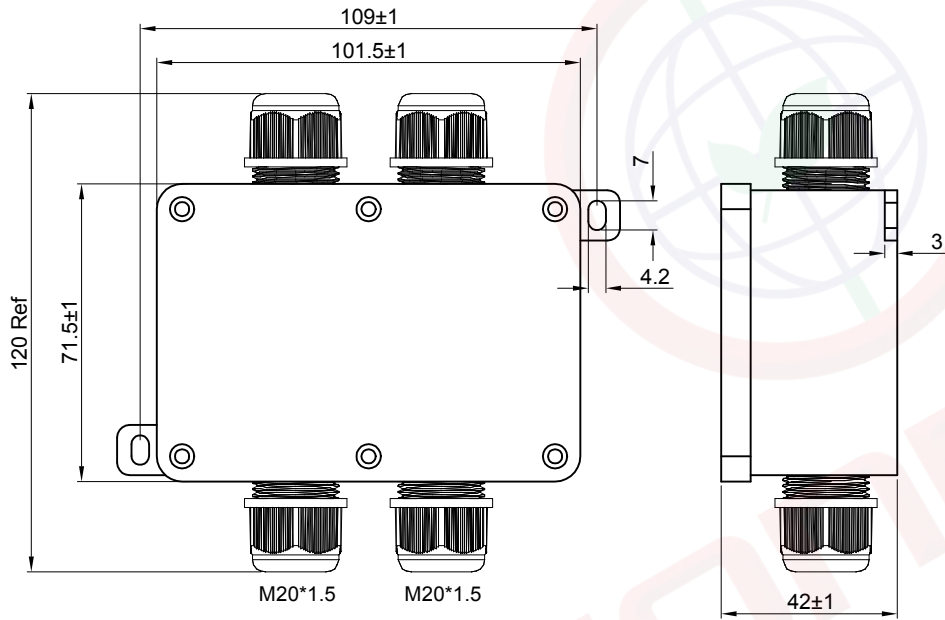

NOTES:
 Temp. Range: -40°C~+85°C.
 Protection grade: IP68.
 Cable OD: Ø5~Ø8mm, Ø9~Ø12mm.
Materials:
 Insulator: PA66, Black.
 Sealings: Silicone, Yellow.
 Screw: Steel.
 Product Number Code:

DS1169-03 - X X X X
 Wire Ring Type
 1: Ø5~Ø8mm
 2: Ø9~Ø12mm
 Main Body Color
 B: Black
 Box Type
 F: Female
 No. of Holes
 4: 4Pos

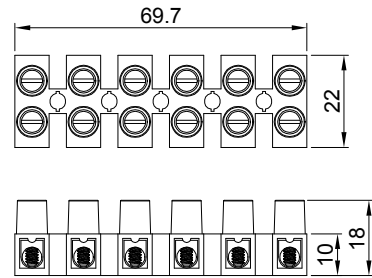

Screw Terminal Blocks



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Waterproof Wire Junction Box 2 To 2 Type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1169-03 SERIES
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1169-03-XXXX-A					

1 2 3 4 5 6 7 8

A B C D E F G H