


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/26/19'		

N=No. Of Contacts

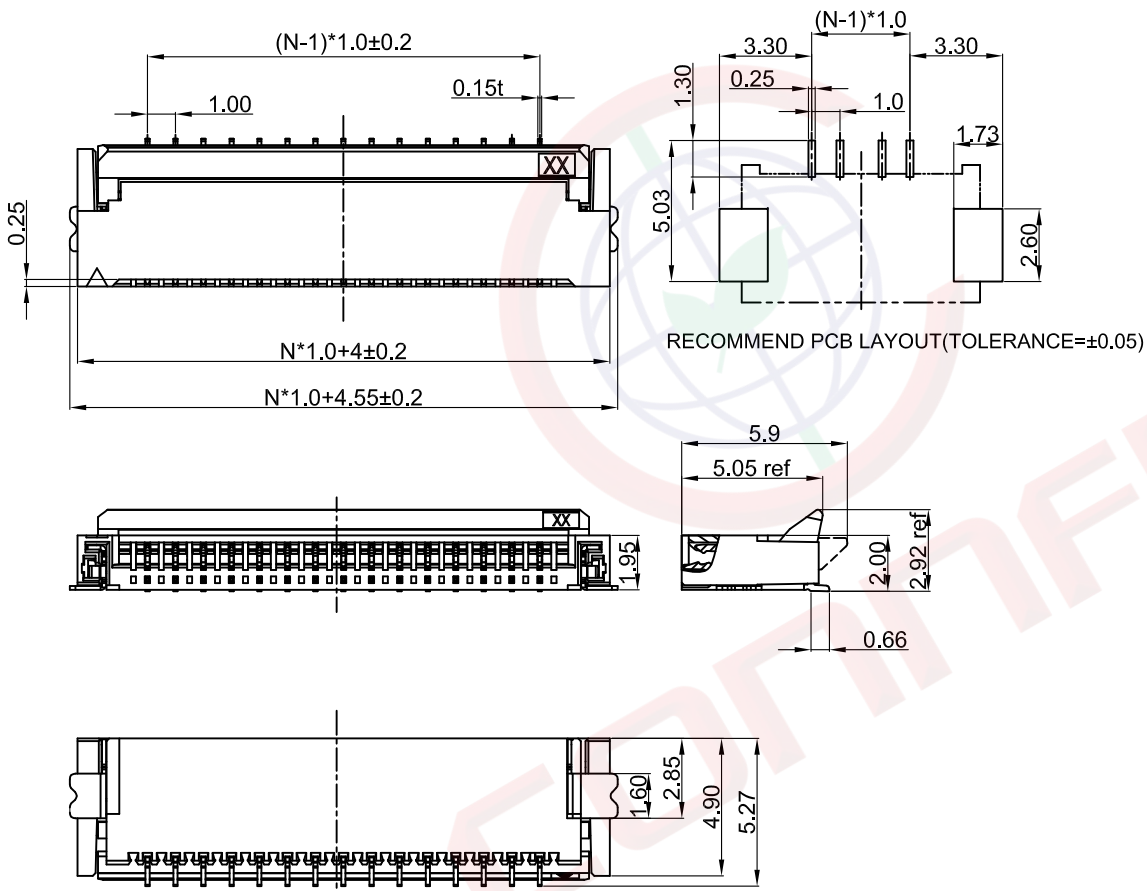

NOTES:

- MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
 - 1.2 CONTACT: COPPER ALLOY.
- SPECIFICATION
 - 2.1 TEMPERATURE:-25°C ~ +85°C.
 - 2.2 CONTACT RESISTANCE:30mΩ max.
 - 2.3 INSULATION RESISTANCE:100MΩ min.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 100V PER MINUTE.
 - 2.5 CURRENT RATING: 0.5A AC/DC
 - 2.6 VOLTAGE RATING: 50V AC/DC
- PRODUCT NUMBER CODE:

DS1020-26- X X X X X

- X — Packing Type
- B: Tube
- R: Tape on Reel
- X — Contact Plating
- T1: Matt tin
- 8: Gold Flash
- X — Cover Color
- B: Black
- X — Housing Color
- V: Ivory
- X — No. Of Contacts
- 04.06.07.10.12.22

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm Pitch H=2.0mm ZIF Easy-on FPC Connector
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1020-26 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1020-26-XXXXX-A					

1 2 3 4 5 6 7 8