


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written permission of CONNELY may constitute a violation of intellectual property rights and/or other applicable laws. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

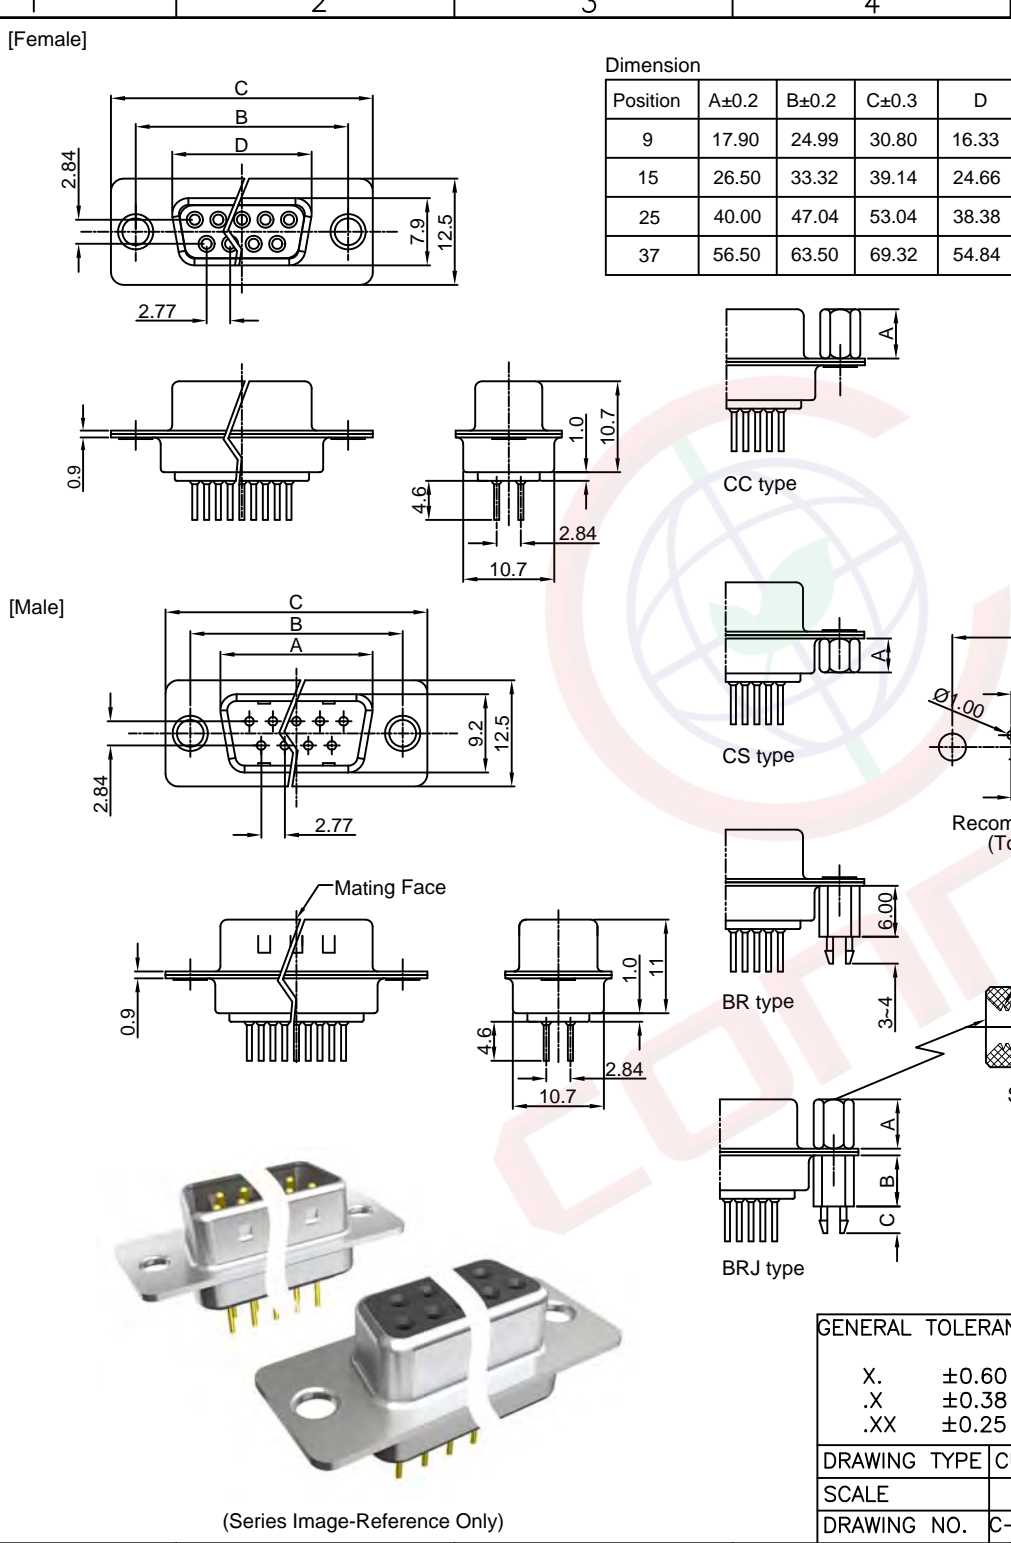

Dimension

Position	A±0.2	B±0.2	C±0.3	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07'		LJC 08/18/07'
B	DRAWING UPDATE	JLZ 09/12/20'		

NOTES:

- Electrical characteristics:
  - Contact resistance: 20mΩ Max. Initial.
  - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
  - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
  - Temperature range: -40°C~+105°C.
- Materials:
  - Insulator:PBT+Glass fiber
  - Shell:Steel
  - Contact:Copper alloy
- Product number code:

DS1034-22 - X X X X X X X

- Screw DIM. A
- S: Standard(W/O nut)
- 1: 5.00 2: 3.00 3: 5.20
- 4: 4.80 5: 5.80 6: 4.00
- 7: 4.80mm(Inside thread M2.6\*0.45p, outside thread unc#4-40)
- Screw type
- S: Standard(W/O nut)
- 1: CC Type 2: CS Type
- 3: BR Type 4: BRJ Type Dim. B:6.0 C: 3~4mm
- 5: BRJ TYPE DIM. B:6.00 C: 5~6mm
- 6: BRJ TYPE DIM. B:6.00 C: 3~4mm (Inside thread M2.6\*0.45P, outside thread unc#4-40)
- Contact plating
- 8: Full gold flash
- C: Full 3u" gold J: Full 5u" gold
- Shell plating
- T: Front & Back Tin
- N: Front Nickel, Back Tin
- Housing color
- B: Black W: White
- U: Blue
- Connector type
- M: Male F: Female
- No. of contacts
- 09,15,25,37

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1034-22-XXXXXX-B		

PROJECTION	TITLE
	D-SUB DIP Straight (Machine Pin)Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1034-22 SERIES

晨翔电子有限公司  
CONNFLY ELECTRONIC CO. LTD

(Series Image-Reference Only)