


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

此處提供的信息來自寧波晨翔電子有限公司並且是保密的。禁止向收件人以外的任何一方披露信息。本文包含的知識產權及其權利（包括但不限於商標、專利、版權、商業機密和技術知識）僅由晨翔或其附屬公司擁有。未經晨翔事先書面同意，嚴禁未經授權的使用或修改。此處提供的所有知識產權僅供參考，並不構成以任何格式或方式使用其權利。晨翔可以自行決定強制執行其知識產權；不履行或延遲行使這些權利並不構成對這些權利的放棄。

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/22/19'		

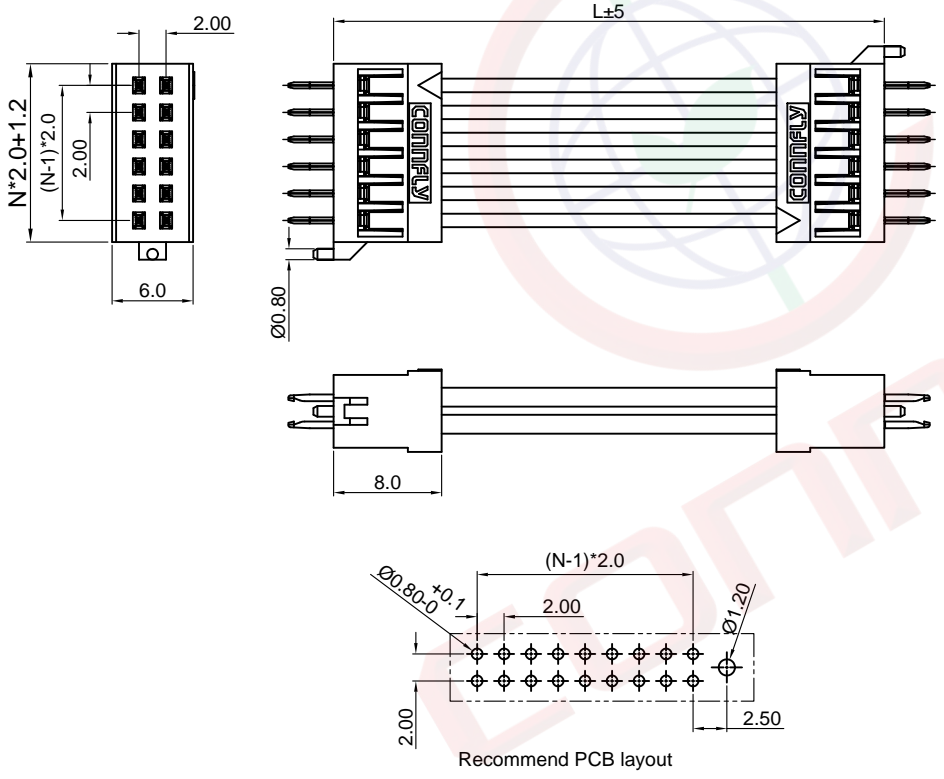

NOTES:

- Materials:
 - Housing material: NYLON 66
 - Contact: Copper Alloy
 - Wire Insulator: PVC
 - Wire: Tin Plated Copper
- Specifications:
 - Current Rating: 1.5A
 - Voltage Rating: 250V AC/DC
 - Contact Resistance: 2Ω Max.
 - Insulation resistance: 500MΩ Min.
 - Wire Range: UL1007 AWG#24-26
- Product Number Code:

DS1067-04 - X X X X X X X X


- Wire color
W: White
- Wire length(Dim L)
080: 80mm
180: 180mm
- Housing color
W: White
- Contact plating
6: Full Tin
- Mounting type
C: Crimp
- Wire gauge
26: AWG #26 24: AWG #24
- Connector type
F: Female
- No. of contacts
2x2-2x20

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0mm SAN With Crimp Wire
X.	±0.60	X.	±5°	UNITS	mm	W/ Post Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1067-04 SERIES
.XX	±0.25	.XX	±2°	晨翔電子有限公司 CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1067-04-XXXXXXX-A					

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/22/19'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

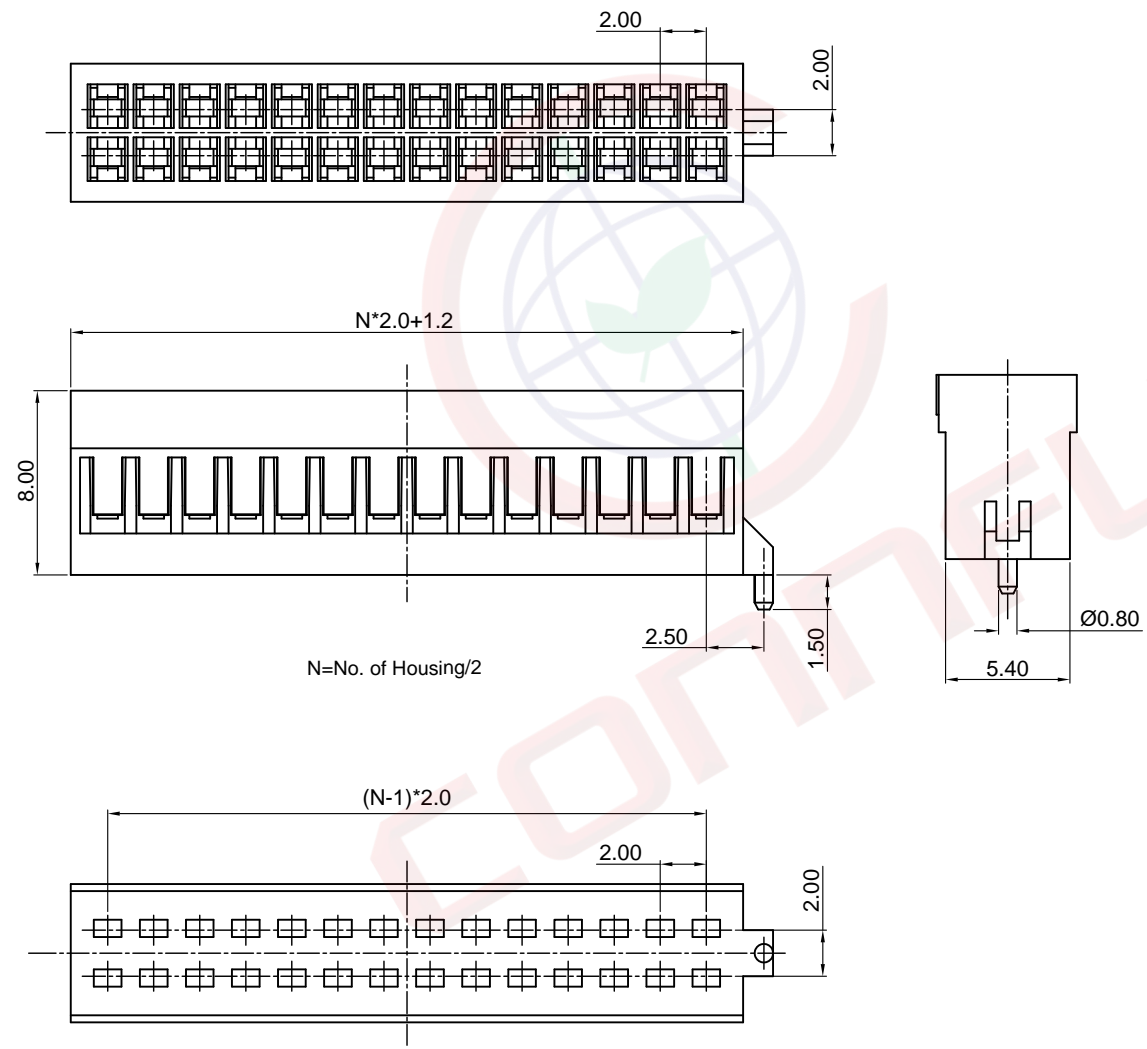

NOTES:

- MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC.
- SPECIFICATION
 - 2.1 TEMPERATURE:-20~+85°C.
 - 2.2 INSULATION RESISTANCE:500MQ min.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:AC 250V PER MINUTE.
- P/N CODE:
 - I - DS1067-04 - S C W 0 X
 - No. of housing 2x2-2x20
 - Housing color W: White

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0mm SAN Double Row	
X.	±0.60	X.	±5°	UNITS	mm	W/ Post Type Housing		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1067-04 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		I-DS1067-04-SCW0X-A						