



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/20/15'	~	

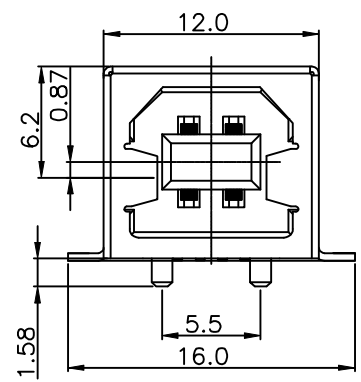

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE: 30mΩ(max.)
 - INSULATOR RESISTANCE: 100MΩ min. AT 100V DC.
 - CURRENT RATING: 1.0A
 - VOLTAGE RATING: 30V AC/DC.
 - DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.
 - OPERATING TEMPERATURE: -40°C ~ +105°C.




2. MATERIALS:

- HOUSING: THERMOPLASTIC(PA-6T) (UL 94-0).
- CONTACT: COPPER ALLOY
- SHELL: COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1099-06 - X X X X

- PACKING TYPE
R: Tape On Reel
T: Tray
- CONTACT PLATING
O: Selective Gold Flash
- SHELL PLATING
N: Nickel
- COLOR OF HOUSING:
W: White
B: Black

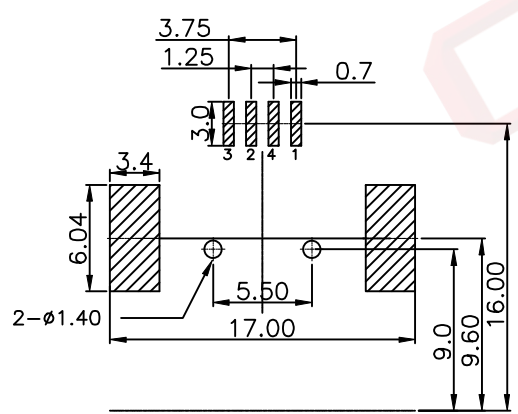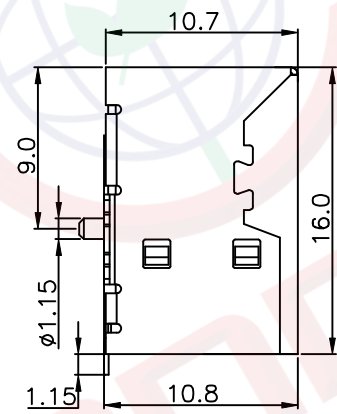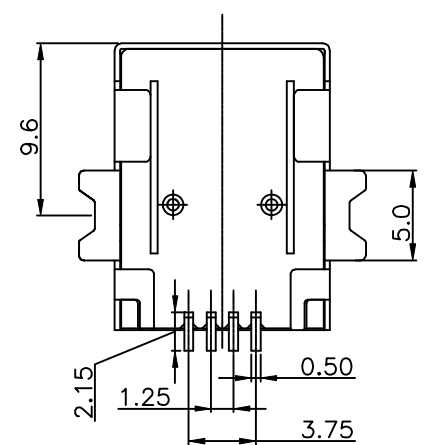

PCB Layout

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB B TYPE	
X.	±0.60	X.	±5°	UNITS	mm		FEMALE R/A SMT TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1099-06 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1 SHEET 1 OF 1						
DRAWING NO.		C-DS1099-06-XXXX-A						