


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/05/17'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING: 125V.
 - CURRENT RATING: 1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY, SELECTIVE GOLD FLASH.
 - SHELL MATERIAL: COPPER ALLOY, NICKEL PLATED.
 - INSULATOR MATERIAL: HIGH TEMPERATURE, BLACK.
- Product Number Code:

DS1128-10 - X X X X X

- Shell Type
 - X: W/O Shrapnel
 - S: W/ Shrapnel
- Contact Plating
 - 0: Selective Gold Flash
- Housing Color
 - B: Black
- No. Of Contacts
 - 8: 8p8c
- Connector Type
 - S: Socket

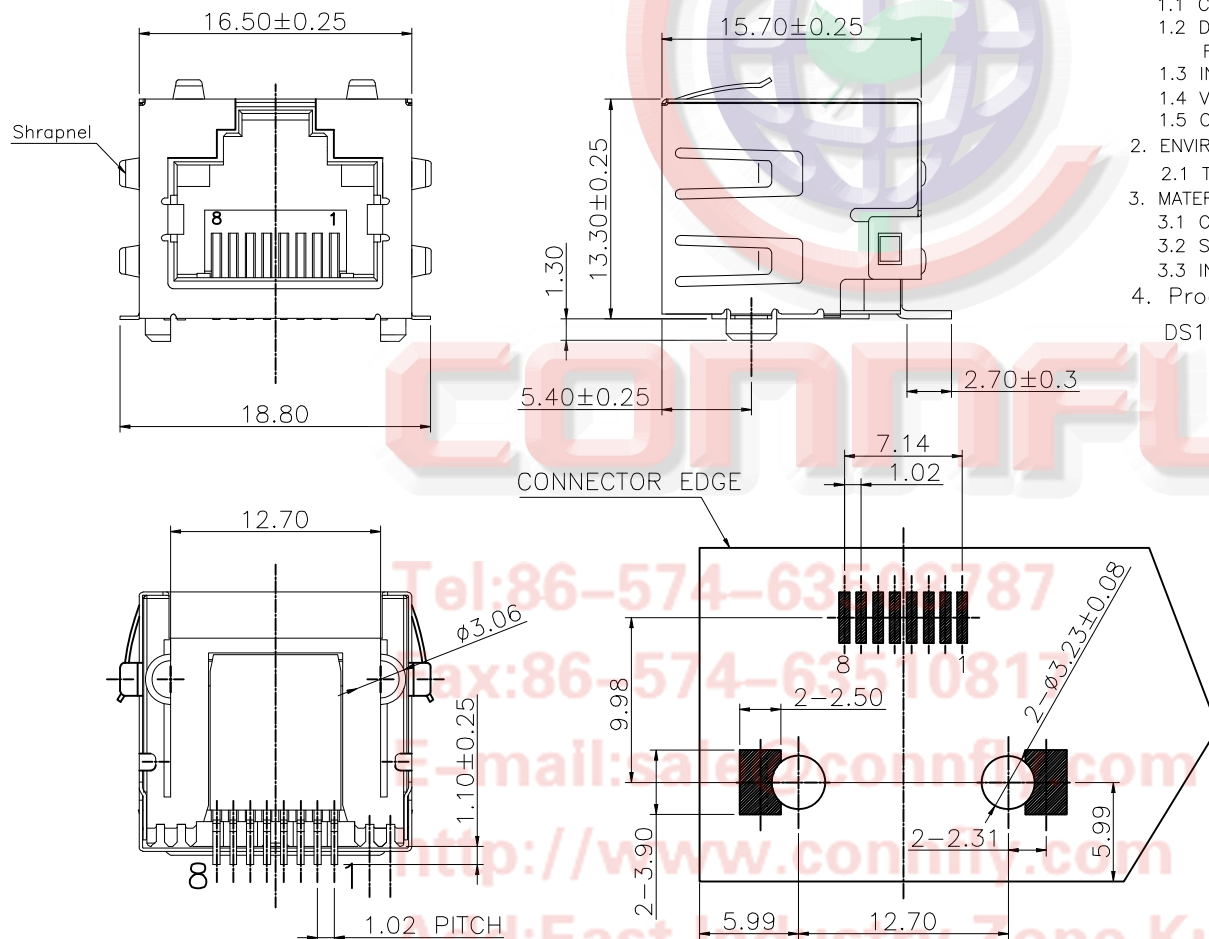

Tel: 86-574-63510787
 Fax: 86-574-63510815
 E-mail: sales@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1128-10-XXXXX-A		

PROJECTION	TITLE	PCB JACK 8P 1PORT	
UNITS	mm	W/O LED W/ Shell SMT Type	
SHEET SIZE	A4	SERIES	DS1128-10 SERIES

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD