

Female



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/23/17'		

NOTES:

- Materials:
 - DC Insulator: Plastic Colour: Black or White.
 - DC Contact: Copper Alloy, Plating Nickel.
- Specifications:
 - Contact Resistance: 100mΩ maximum.
 - Insulation Resistance: 1000MΩ minimum.
 - Dielectric Withstanding Voltage: 1000V AC 1 minute.
 - Current: 5A AC,DC.
 - Voltage: 12~24V DC.
 - Application wire range: AWG26.
 - Temperature: -20°C~+80°C.
- Product Number Code:

DS1137-39 - X X X X X X X

- Wire length(Dim L)
150: 150mm
.....
- Colour of Insulator
B: Black W: White
- Wire Stripping Length(Dim S)
015: 15mm
- Pin plating
N: Nickel
- Mounting type
W: Solder type
- Wire Gauge
26:UL2464 26AWG
- Connector type
F: Female M: Male

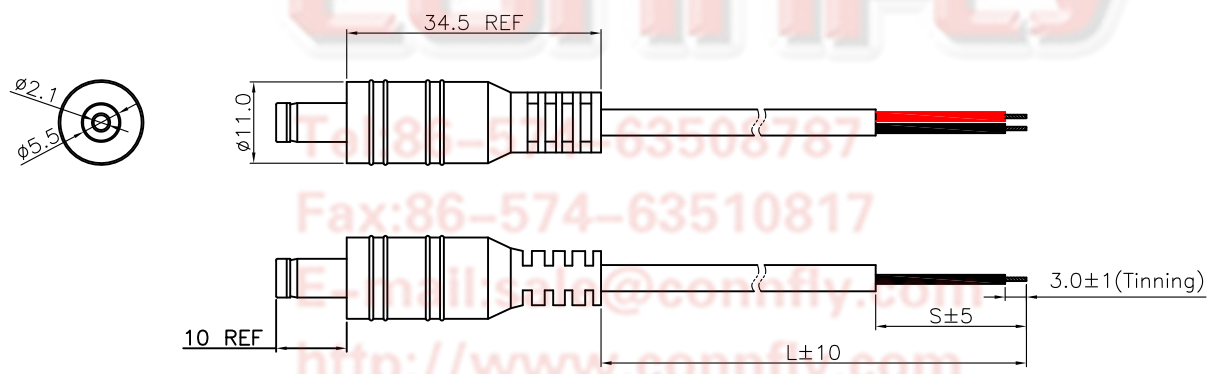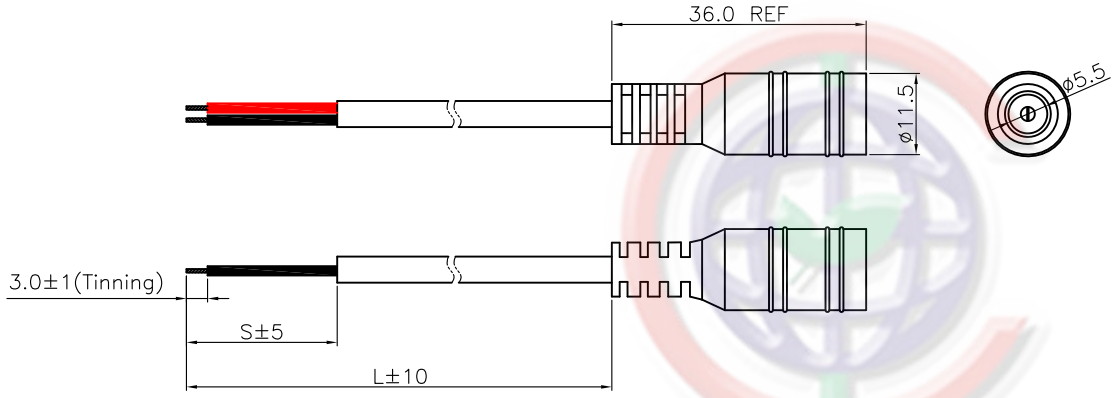

Male

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	5.5mm DC Jack/Plug Cable
UNITS	mm
SHEET SIZE	A4
SERIES	DS1137-39 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1137-39-XXXXXXX-A

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

CONNFLY®

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sales@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333