
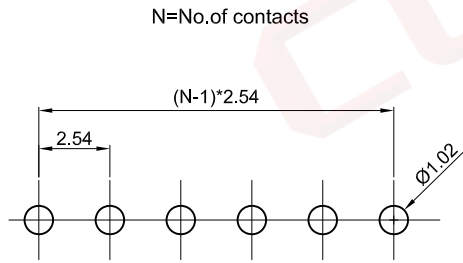

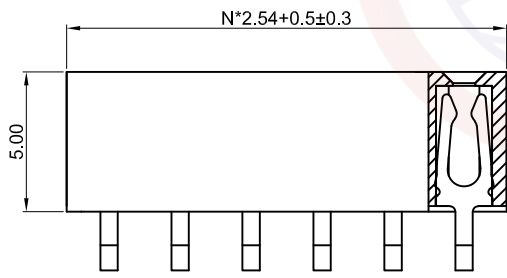


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/01/18'		

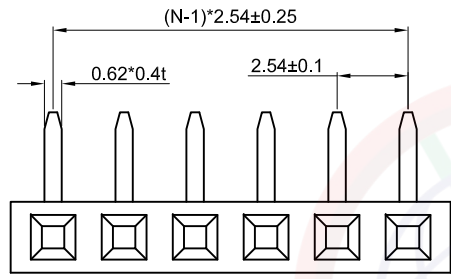

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

NOTES:

- CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING:3A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD
 - INSULATOR MATERIALS: PBT,BLACK,UL94-V0.

4. PRODUCT NUMBER CODE:

DS1023-59 - X X X X X X

- X X X X X X — Packing type
T: Tray
- Housing color
B: Black
- Contact plating
8: Full gold flash
- Mounting type
R: R/A Type
- Connector type
S: Socket
- No.of contacts
1x2-1x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Female header R/A Type H=5.0mm		
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1023-59 SERIES		
.X	±0.38	.X	±3°						
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1023-59-XXXXX-A							

1 2 3 4 5 6 7 8